

Nikasi

SOIL, WASTE & VENT (SWV)

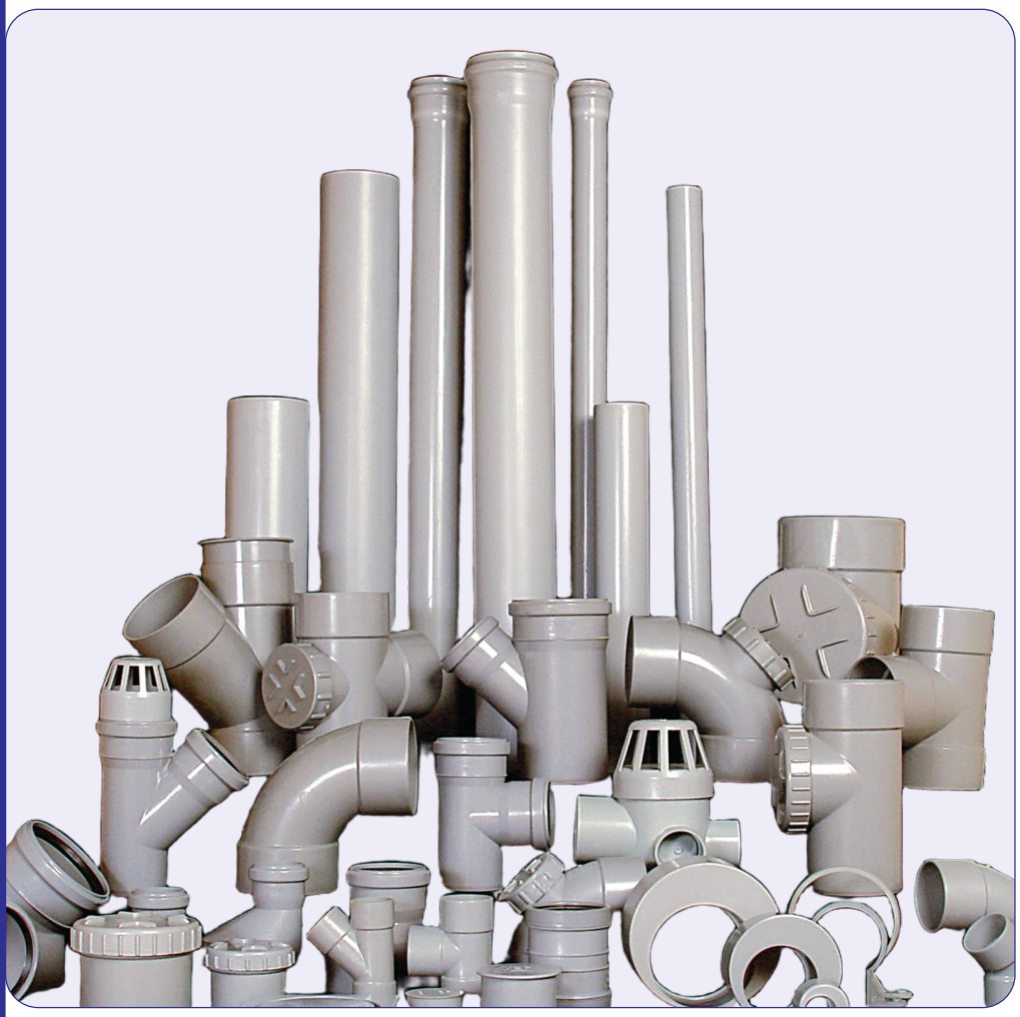

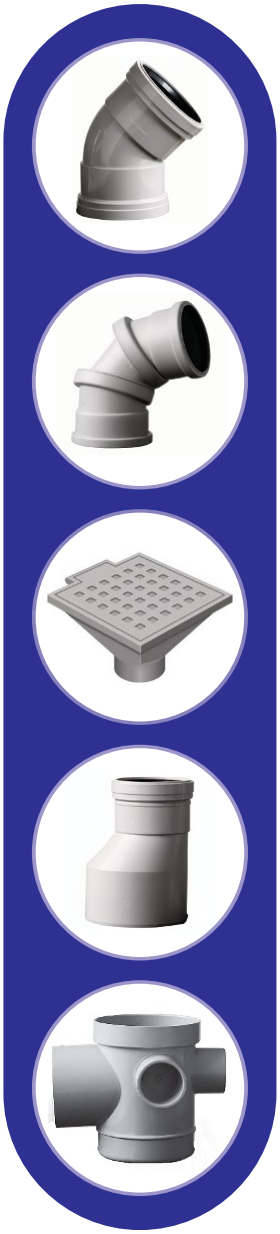


UPVC

DADEX

DADEX

Leader in Roofing and Thermoplastic Piping Systems

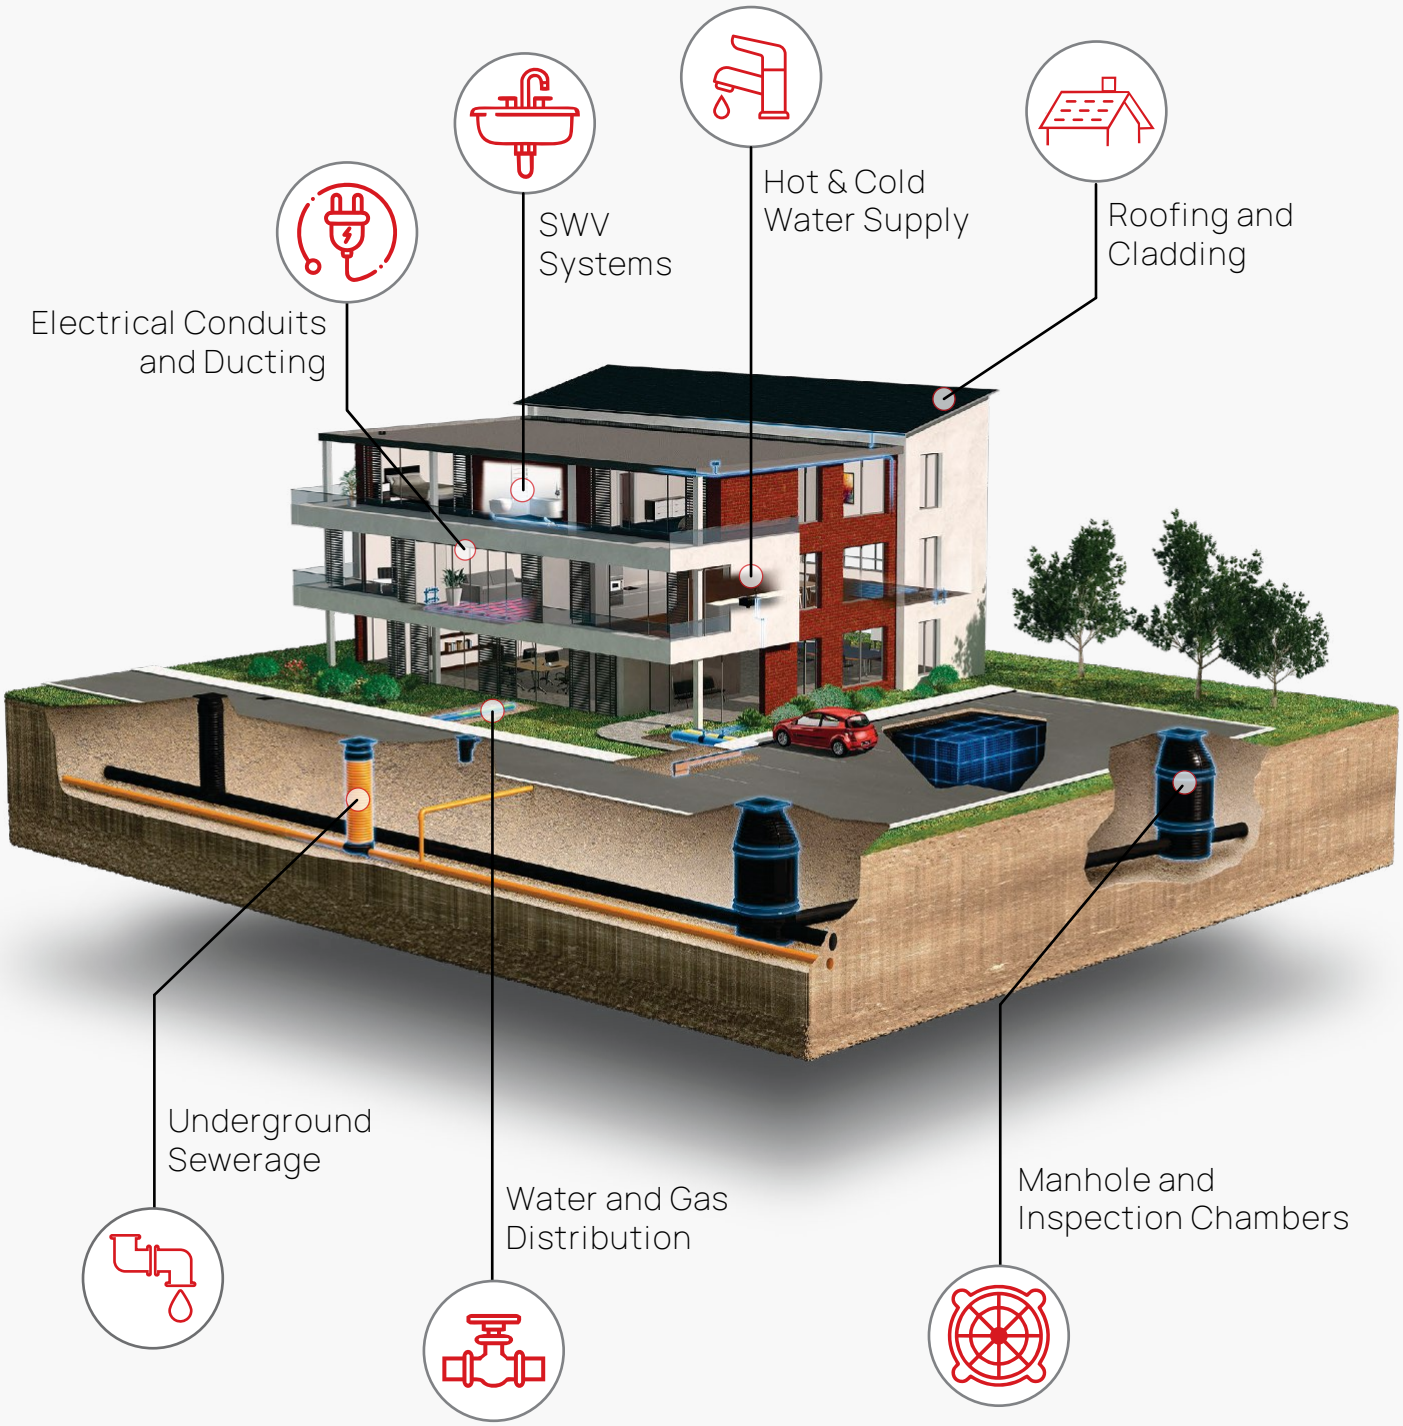

Discover our broad portfolio at

www.dadex.com

ABOUT DADEX

Dadex was established as a public limited company in 1959. We started with the manufacturing of FC roofing systems at our facilities in Hyderabad, under the dynamic leadership of our Founder Chairman, Mr. Kassim Dada. Being a forward-looking organization, his son, Mr. Sikander Dada kept up to date with the market, and was instrumental in the diversification with plastic piping systems. Presently we produce various thermoplastic systems such as UPVC, PP-R, PP-RCT, PP, PE.

Headquartered in Karachi, our two manufacturing facilities based in Hyderabad and Sundar Industrial Estate (near Lahore) are equipped with state of the art machinery. Our joint efforts have led Dadex to the ISO 9001, ISO 14001, ISO 45001 and PSQCA certifications.

We aim to set standards in every field we enter. Customer focus, quality and innovation are reflected in every aspect of our business. Offering customized solutions to a cross section of markets for over 65 years, Dadex today is a hallmark of trust and reliability.

We believe that our strength lies in delighting our customers. That is why providing quality products backed by round the clock technical support services are the Dadex promise to all our valued customers.

EXTENSIVE PRODUCT RANGE

Water Supply - Infra-Structure

- Aquadex (UPVC Pressure Pipe System)
- T-Flex (PE 100 Pipes & Fittings)

Water Supply - Housing

- Polydex Premium (PP-RCT Pipe System)
- Polydex (PP-R Pipe System)
- Thermoline (PP-R Pipe System)
- Aquadex (UPVC Pressure Pipe System)

Soil, Waste and Vent (SWV)

- Nikasi - Solvent (UPVC Pipe System)
- Nikasi - Rubber Ring (UPVC Pipe System)
- Polyduct (Low Noise System)

Underground Sewerage and Drainage

- Flow Line (UPVC Underground Sewerage System)
- Inspection Chambers and Manholes

Cable Ducting

- PE Cable Duct Pipes
- Electroduct (UPVC Conduits as per IEC - EN Standard)
- Conduits (UPVC Conduits as per Dadex Standard)

Gas Supply

- T-Flex for gas (PE 80 and PE 100)

Introduction

Nikasi is a complete soil, waste and vent (SWV) sanitary pipe system made of unplasticised Polyvinyl Chloride (UPVC) compound. Due to excellent physical & chemical characteristics and ease of installation, Nikasi SWV system is now most popular and reliable SWV sanitary pipe system for inside buildings.

Material

Unplasticised Polyvinyl Chloride (UPVC).

Nikasi pipes and fittings are light grey in colour.

Standards & Specifications

Nikasi pipes conform to ISO 3633/EN 1329 & PS 3214

Nikasi fittings: Imported fittings.

Solvent cement and rubber ring fittings both conform to ISO 3633 / EN 1329.

Available Range

Nikasi pipes are available in nominal outside diameters of 50mm, 75mm, 110mm, 160mm and 200mm in standard lenghts of 3m and 4m.

1. **Socketed end:** Pipe with one end socketed for rubber ring.
2. **Plain end:** Pipe with both ends plain.

Nominal Outside Diameter (mm)	Minimum wall thickness (mm)
40	3
50	3
75	3
110	3.2
160	3.2
200	3.9

Features & Benefits

- **Smooth Flow:** Exceptionally low friction and smooth inside surface of Nikasi Pipe System minimises the buildup of deposits commonly seen in conventional cast iron (C.I.) pipe system. Therefore, Nikasi Pipe system ensures smooth & uninterrupted flow even after continuous use for the decades.
- **Lightweight:** Nikasi pipes are lightweight, they weigh only one fifth of C.I. Pipe. Therefore they have a lower transportation, handling and installation cost further due to light weight installation of Nikasi system is easy and faster.
- **Non-Corrosiveness and Chemical Resistance:** Nikasi Pipe System is non-corrosive and it is highly resistant to a number of aggressive chemicals such as mineral acids, alkalis and aqueous salt solutions. However our technical staff should be consulted for further assistance in special applications.
- **Self - Extinguishing:** UPVC used in Nikasi is self-extinguishing and does not support combustion.
- **Non - Conductivity of Electricity:** Nikasi does not conduct electricity and this outstanding feature makes this system safe to use in buildings.



NIKASI SYSTEMS

Nikasi Solvent Cement System

The Nikasi Solvent Cement SWV System is an advanced piping solution specifically designed for the safe and efficient management of soil, waste, and vent lines in residential and commercial buildings. Unlike conventional systems, the Nikasi solvent cement SWV System uses a special solvent welding process that creates permanent, leak-proof joints, ensuring long-term reliability and peace of mind for homeowners and builders alike, if properly and professionally joined.

Its smooth internal surface prevents blockages and facilitates the free flow of waste and gases, keeping living spaces hygienic and odor-free. The system is built to withstand everyday wear and tear, extreme weather conditions, and the demands of multi-story buildings, making it an ideal choice for modern housing developments, apartments, and high-rise projects.

Lightweight yet durable, the Nikasi Solvent Cement SWV System simplifies transportation, handling, and installation, saving both time and costs during construction. Once installed, it requires minimal maintenance, providing decades of dependable performance. Whether used in homes, offices, hospitals, schools, or commercial complexes, the SWV System ensures a clean, efficient, and sustainable solution that adds value to every building.

By combining durability, hygiene, and ease of use, the Nikasi solvent cement SWV System sets the benchmark for modern piping solutions in today's construction industry—a system designed not just for buildings, but for better living.

Nikasi Rubber Ring System

The Nikasi Rubber Ring SWV System is a state-of-the-art piping solution designed for soil, waste, and vent applications in residential and commercial construction. Unlike solvent-welded systems, this innovative system uses precision-engineered rubber ring joints that provide flexibility, durability, and long-lasting performance.

Its advanced jointing mechanism allows easy installation without the need for adhesives, ensuring faster construction timelines and hassle-free maintenance. The rubber rings create a strong and secure seal, capable of withstanding pressure variations, vibrations, and minor ground movements—making it especially suitable for multi-story buildings, large housing projects, and public facilities.

Engineered with smooth internal surfaces, the Nikasi Rubber Ring System minimizes blockages and maintains hygienic flow conditions. The robust design ensures resistance against chemicals, corrosion, and external impacts, guaranteeing performance in both residential and commercial environments.


This system offers long-term serviceability while allowing for easy dismantling and re-jointing whenever future modifications or extensions are required. For developers, contractors, and homeowners, the Nikasi Rubber Ring System delivers a reliable, low-maintenance solution that blends strength, convenience, and modern technology.

By providing a secure, flexible, and efficient piping network, the Nikasi Rubber Ring System ensures healthier living spaces and dependable infrastructure for generations to come.



DADEX NIKASI SWV SYSTEM
RELIABLE. DURABLE.
BUILT FOR PERFORMANCE.

Nikasi

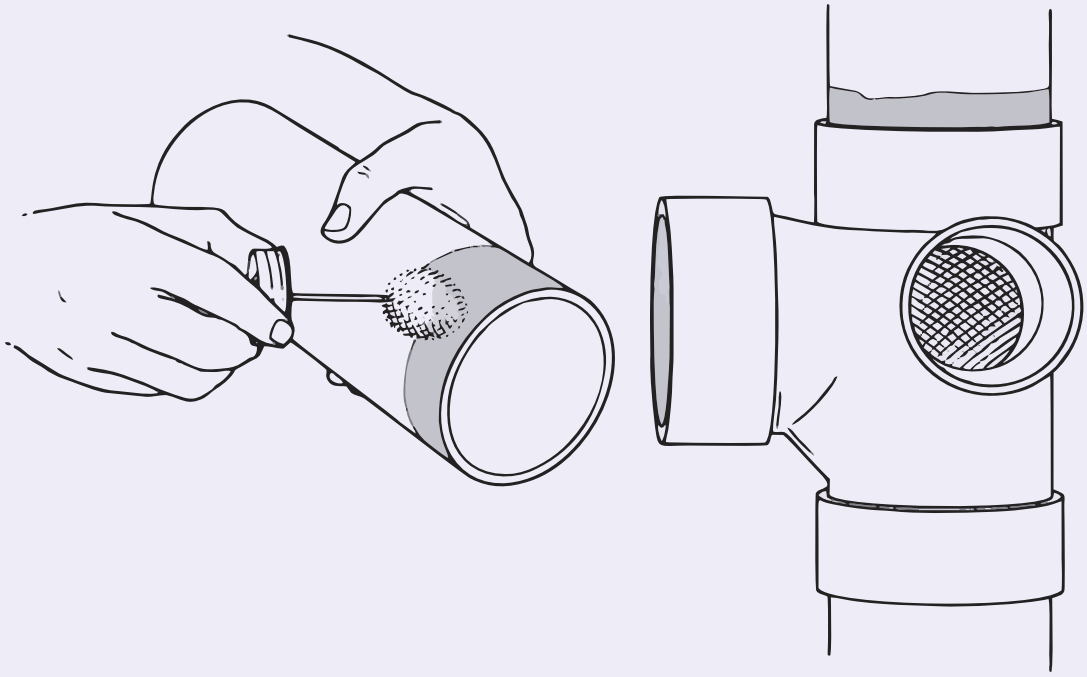

SOLVENT CEMENT SYSTEM

NIKASI FITTINGS - SOLVENT CEMENT

Tee/ Access Tee (MF / FF)




Double Tee (MF / FF)



Reducing Double Tee (MF / FF)



15° / 30° Bend (MF / FF)



Reducing Tee / Access Reducing Tee (MF / FF)



45° Bend / Access Bend (MF / FF)



88° Bend / Access Bend (MF / FF)



Single 'Y' (MF/FF)



Access 'Y' (MF / FF)




Reducing 'Y (MF / FF)



Double 'Y' (MF / FF)



Hopper and Grid



Knuckle Elbow 90°



P – Trap Body



MultiFloor Trap



Eccentric Reducer



Reducer



Socket / Double Socket



Access Pipe (MF / FF)



Pipe Clip



Omega Clip



End Cap




Access Cap



JOINTING METHOD
NIKASI SOLVENT CEMENT SYSTEM

Solvent cement jointing is widely used and many components in the range are available with this facility to provide an effective alternative. By selecting these fittings a solvent weld system can be installed, however, ring seal joints must be incorporated to control thermal movement in the vertical pipe stacks.

While the most popular method of jointing larger size UPVC pipes and fittings is by rubber ring seal, with small diameter waste pipework the principal choice is usually solvent weld. Where this technique is used expansion couplings must be introduced where pipe lengths exceed 1.8 metres or between fixed points.

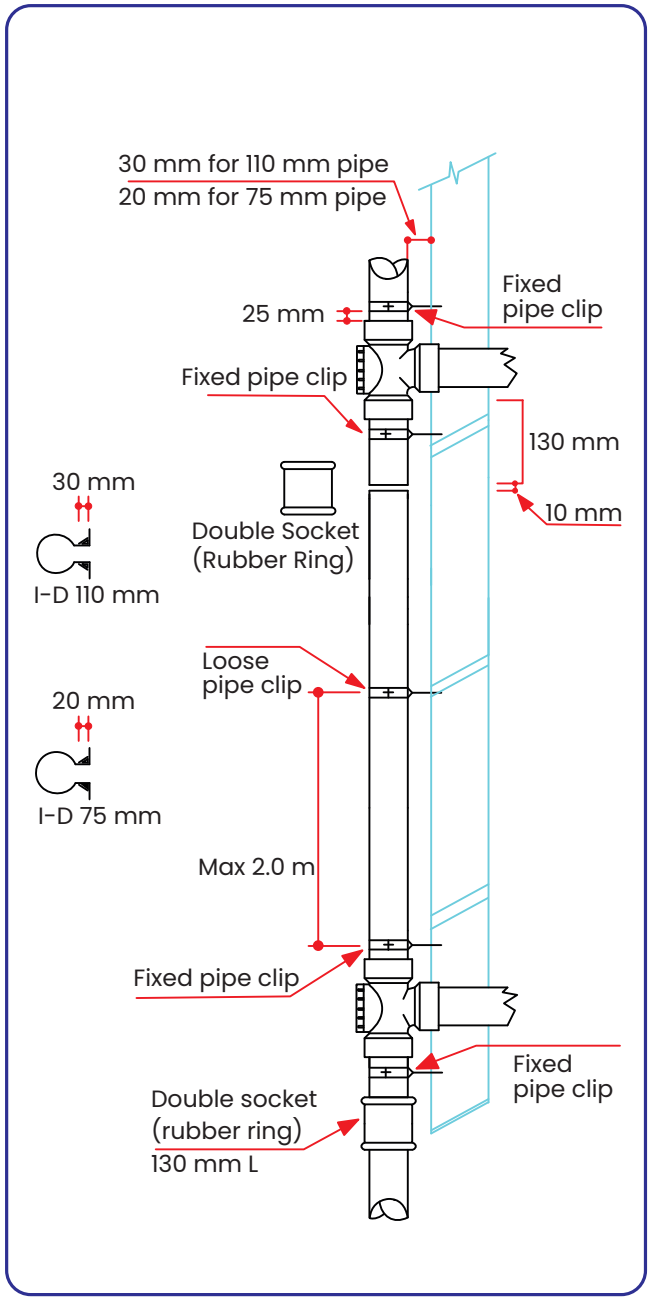


Pipe Cutting and Preparation


Preparing Pipe Ends

Pipes cut on site must be clean cut at right angles to their horizontal axis.
Chamfer the spigot end: this is essential to ensure that the sealing ring is not displaced during insertion.

Depth of Entry Mark

Some plain end fittings have a depth of entry mark moulded on the spigot. This depth of entry allows the pipe to expand into the fitting socket by a minimum of 10mm. Insert the spigot into the socket until the depth of entry mark is just visible. All pipes (whether site cut or otherwise) and other plain ended fittings must be inserted to the full depth of the socket, marked at the socket face and then withdrawn at least 10mm. This gap will accommodate the movement of pipe due to Expansion and contraction.

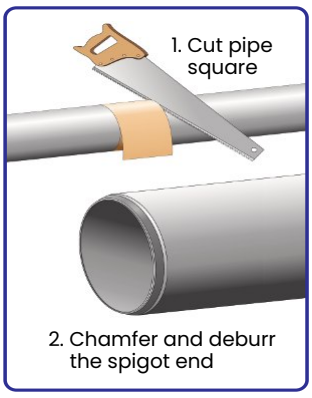

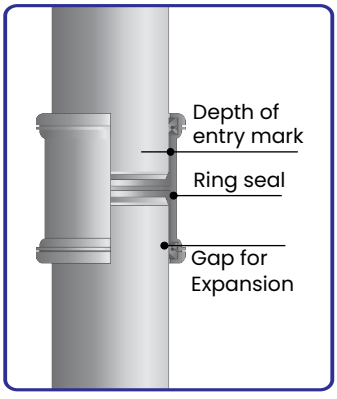

Jointing Procedure

- Before using solvent based cleaners or cement:
  - Read instructions printed on the can
  - Ensure there is sufficient ventilation.
- Make sure pipe or fitting spigot and solvent weld socket are dry, clean and free from grit or dust.
- Clean surfaces of spigot and socket with Dadex
- Degreasing Cleaner. Apply liberally using a clean non synthetic rag or absorbent paper.
- Apply one coat of Dadex Solvent Cement. Apply an even coat to both surfaces using the applicator provided or a paint brush. Stroke the cement along and not around the surfaces.
- Immediately insert pipe or fitting spigot fully into the socket. Each solvent weld joint MUST be completed within 1½ minutes.
- Hold for 20-30 seconds. Remove any surplus cement from the mouth of the socket.
- The joint may be handled after 10 minutes and commissioned after 24 hours.

Maximum Recommended Spacing of Clamps for Nikasi Pipe

The given table shows recommended distances in metre for support centres that are necessary for a proper pipe system installation.

Nominal Outside Diameter (mm)	Distance between Clamps for Horizontal Pipes (m)	Distance between Clamps for Vertical Pipes (m)
40	0.40	1.2
50	0.50	1.5
75	0.75	1.8
110	1.10	1.8
160	1.60	1.8
200	1.60	1.8

The values shown are for general installations only. Attention is drawn to special requirements that may be needed in more demanding applications

1
Cut the Pipe



2
Cut the Pipe




3
Clean the Pipe



4
Apply Dadex Solvent Cement



5
Hold for 20-30 seconds



Cleaner/Solvent Cement Usage Guide (Approx.) For Solvent Weld Joint

Description	Nominal Pipe Sizes / Number of Joints					
	40mm	50mm	75mm	110mm	160mm	200mm
Degreasing Cleaner 125ml	45	33	24	16	10	4
Degreasing Cleaner 250ml	90	66	48	32	20	9
Solvent Cement 125ml	30	20	10	5	3	1
Solvent Cement 250ml	60	40	20	11	6	3
Solvent Cement 500ml	120	80	40	22	12	6

Note: Above information about number of joint is approximate for ideal conditions, the quantity may vary due to working and ambient conditions.

Safety Instructions

When making solvent weld joints it is essential to observe normal safety rules for handling solvent cement:

- Never smoke or bring naked flames near the area of work.
- Work in a well ventilated area to avoid inhaling fumes.
- Close the solvent container after use and store in a cool area.
- Do not allow solvents or cleaners to come into contact with skin.

Refer to the local safety regulations and guidelines where applicable.

Nikasi



RUBBER RING SYSTEM

NIKASI FITTINGS - RUBBER RING

Tee (FF / MF)



Access Tee (FF / MF)



Reducing Tee (FF / MF)



Double Tee (FF)



Reducing Double Tee (FF / MF)



Reducing Access Tee (FF / MF)



Adjustable Bend



Bend 15° (FF / MF)



Bend 30° (FF / MF)



Bend 45° (FF / MF)



Bend 88° (FF / MF)



Access Bend 88° (FF / MF)



Access Pipe (FF / MF)



Socket / Double Socket



Reducer



Single 'Y' (FF / MF)



Reducing 'Y' (FF / MF)



Access 'Y'



Vent Cowl



Clips



End Cap



Access Cap



Double 'Y' (FF / MF)



JOINTING METHOD
NIKASI RUBBER RING SYSTEM

The ring seal has been successfully employed as the principal method of jointing large diameter UPVC pipes and fittings.

This particular technique has proved extremely reliable as the joint can accommodate thermal movement that will occur as a result of temperature variations. An expansion gap of between 5-10mm should be allowed within each ring seal socket as each full length of pipe is installed and fixed using socket and barrel pipe clips.


Pipe Cutting and Preparation


Preparing Pipe Ends
Pipes cut on site must be clean cut at right angles to their horizontal axis.


Chamfer the spigot end: this is essential to ensure that the sealing ring is not displaced during insertion.

Depth of Entry Mark
Some plain end fittings have a depth of entry mark moulded on the spigot. This depth of entry allows the pipe to expand into the fitting socket by a minimum of 10mm. Insert the spigot into the socket until the depth of entry mark is just visible. All pipes (whether site cut or otherwise) and other plain ended fittings must be inserted to the full depth of the socket, marked at the socket face and then withdrawn at least 10mm. This gap will accommodate the movement of pipe due to Expansion and contraction.

NIKASI SWV SYSTEM (Rubber Ring System)

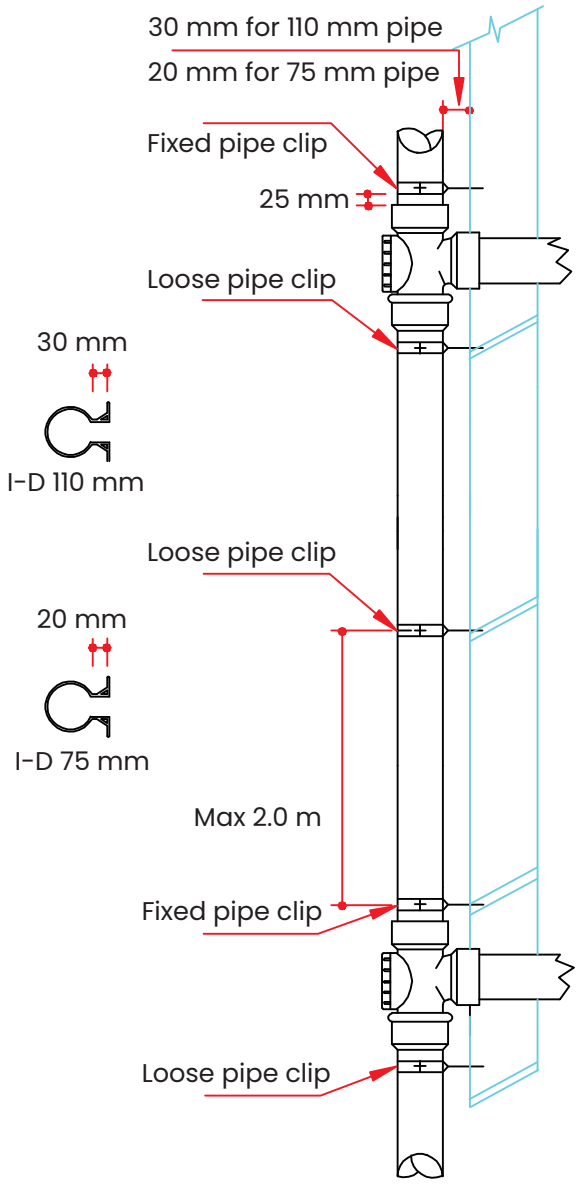


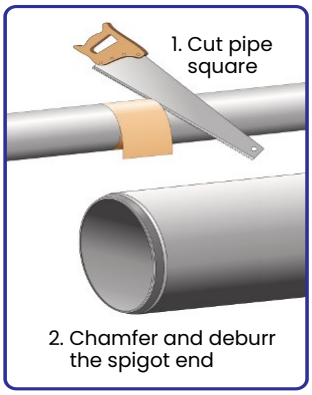

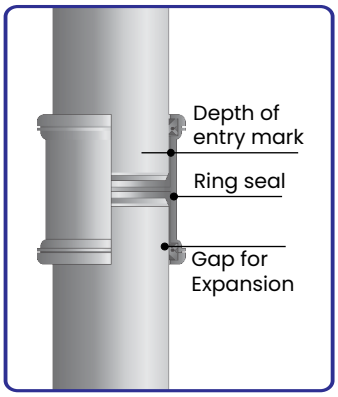


Jointing Procedure

- Ensure any pipe cut on site is also chamfered.
- Check that the sealing ring is properly seated in its housing in the socket of the fitting.
- Ensure all components to be joined are dry, clean and free from grit or dust. Note any deep scratches on the pipe or fitting spigot as these may prevent the sealing ring from forming a water tight seal.
- Lubricate evenly around the pipe or fitting spigot end with suitable lubricant (soup solution may also be used). Do not lubricate inside the socket and not the ring seal. The spigot can then be inserted into the socket.
- Correctly align the components to be joined.
- Push the pipe or fitting spigot fully into the socket. Mark the pipe or fitting spigot at the socket face and then withdraw it by a minimum of 10mm to allow for thermal expansion.
- Make a subsequent check to ensure that the expansion gap is not lost during further installation work.

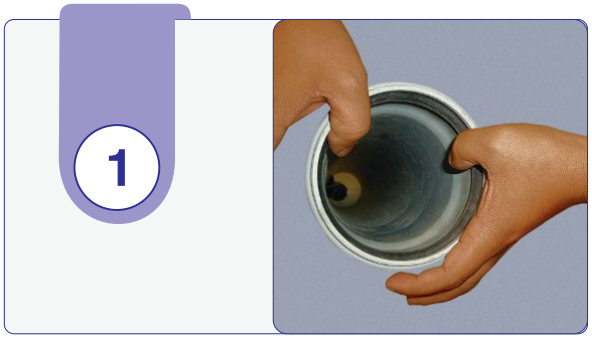





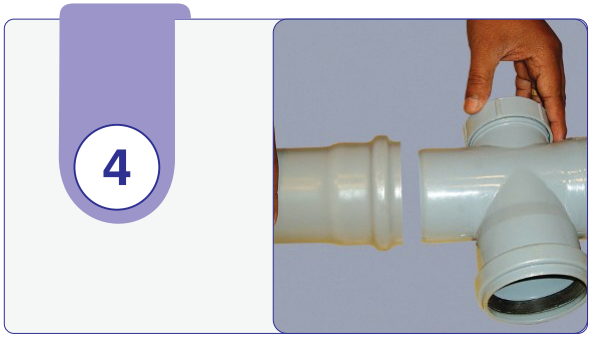



Maximum Recommended Spacing of Clamps for Nikasi Pipe

The given table shows recommended distances in metre for support centres that are necessary for a proper pipe system installation.

Nominal Outside Diameter (mm)	Distance between Clamps for Horizontal Pipes (m)	Distance between Clamps for Vertical Pipes (m)
40	0.40	1.2
50	0.50	1.5
75	0.75	1.8
110	1.10	1.8
160	1.60	1.8
200	1.60	1.8

The values shown are for general installations only. Attention is drawn to special requirements that may be needed in more demanding applications

Nikasi



HANDLING, STORAGE, AND SAFETY INSTRUCTIONS

RECEIVING AND HANDLING PIPE SHIPMENTS

Receiving & Inspection:

Each pipe shipment is carefully loaded at the factory using standard methods. The transporter is then responsible for delivering the pipe as received from Dadex. Each pipes shipment shall be inspected with care upon arrival by customer's representative.

Upon delivery of any Nikasi shipment, a designated representative must conduct a formal inspection.

Verify Shipment Integrity:

Cross-check all materials (pipes, fittings, rubber rings) against the accompanying Delivery Note.

Document Any Damage:

a) Note visible damage, discrepancies, or missing items directly on the Delivery Note before signing.

b) The transporter must acknowledge any issues.

Claims Procedure:

a) For ex-factory supplies, notify the transporter immediately to initiate a claim.

b) Retain all damaged materials for inspection and return; do not dispose of them.

Transportation Guidelines:

Vehicles used for transporting Nikasi pipes must be selected and loaded carefully to prevent damage.

Vehicle Requirements

Use flatbed vehicles with a clean, smooth surface free of protrusions that could scratch or damage pipes.

Loading & Support

a) Pipes must be uniformly supported along their length.

b) Overhang must not exceed 1.0 meter.

Stacking Protocol

Socketed pipes must be stacked in alternating layers so that the pipe barrel carries the weight, not the socket ends.

Loading Order

a) Load heavier, large-diameter pipes (e.g., 160mm, 200mm) first.


b) Place lighter, smaller-diameter pipes (e.g., 40mm, 50mm) on top.

Joint Specific Considerations:


The Nikasi SWV System is available with Solvent Cement and Rubber Ring joints.

Protect all socket and spigot ends from impact, deformation, and contamination.

For Rubber Ring systems, ensure rubber seals are clean, undamaged, and not exposed to direct sunlight before installation.

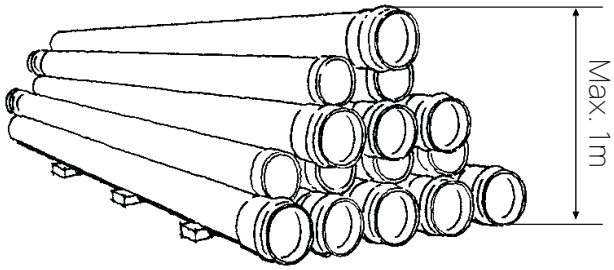



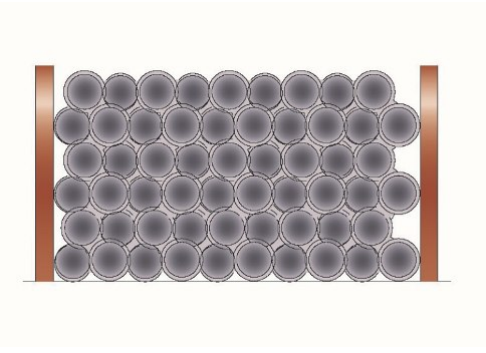

DISCLAIMER

This document provides general guidelines. Always adhere to the most current official installation. Specific site conditions may necessitate additional safety and handling measures.

Unloading & On-Site Handling:

Nikasi UPVC pipes are lightweight but require careful handling to avoid damage.

Method Selection

a) Manual Unloading: Pipes up to 110mm can be unloaded manually by two persons.

b) Mechanical Unloading: Pipes 160mm and larger require forklifts with soft slings or other mechanical assistance.


Safety & Handling Guidelines

a) Do not drop, throw, or drag pipes.

b) Avoid contact with sharp objects.

c) Use proper lifting techniques.

d) When mechanically lifting larger diameters, use at least two non-abrasive slings to distribute the load and prevent bending.

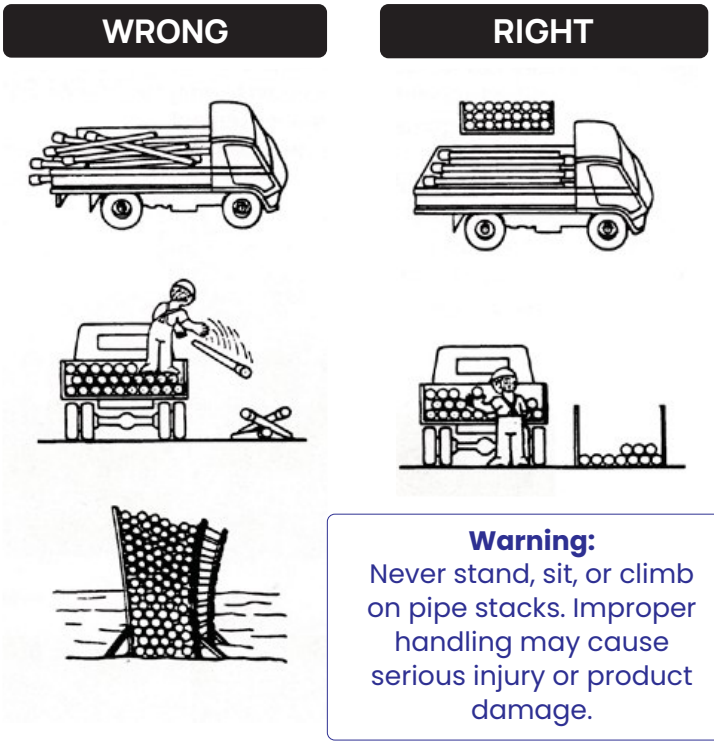

Warning:
Never stand, sit, or climb on pipe stacks. Improper handling may cause serious injury or product damage.

Storage & Stacking Guidelines:

Proper storage is critical to maintain the dimensional integrity and performance of the Nikasi SWV System.

Foundation Requirements

1. Store on a firm, level surface.
2. Use timber bearers (minimum 75mm x 75mm) to support the pipe barrel evenly.
3. Space bearers no more than 1.5 meters apart.

Stacking Configuration

1. Stack pipes so that sockets and spigots alternate at opposite ends.
2. Ensure sockets protrude and are never load-bearing.
3. Maximum stack height: 1.5 meters
4. Maximum stack width: 3.0 meters

Environmental Protection

1. Sunlight: Prolonged UV exposure causes discoloration.

a) Cover stacks with opaque, UV-resistant tarpaulin or canvas.


b) Allow air circulation between cover and pipes to prevent heat buildup.


2. Distortion: Pipes at the bottom may temporarily deform under load. This is normal and typically self-corrects due to the elastic memory of UPVC.


Picture 1



Picture 2


Picture 3


Picture 4


Picture 5



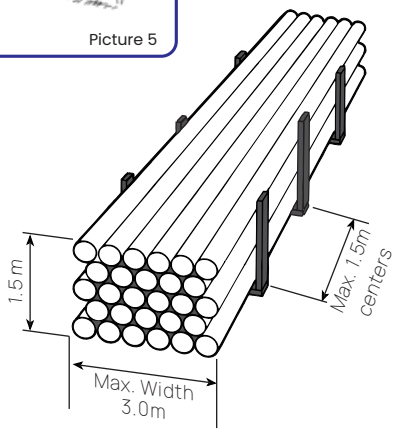

Nikasi



MAINTENANCE, REPAIRS AND TESTING

MAINTENANCE, REPAIRS AND TESTING

The Dadex Nikasi systems are designed with precision engineering to ensure long-lasting performance and minimal maintenance requirements.

MAINTENANCE:

Dadex systems are virtually maintenance-free, ensuring hassle-free operation and superior reliability.

BLOCKAGES

In the rare event of a blockage:

- Use only flexible or roller-type rods.
- Avoid metal-pointed or boring rods to prevent damage.
- For mechanize rodding, ensure it is carried out by trained operators only.

CLEANING PIPEWORK:

Cleaning is simple and effective:

- Wipe with a damp cloth or use a mild detergent.

AIR ADMITTANCE VALVES

Regularly ensure the diaphragm is free from any obstructions.

FIRE STOP SEALS

No routine maintenance is required; however:

- Inspect regularly for any signs of damage.
- Replace immediately if a seal is found defective.

ILLUSTRATION

(Refer to the diagram for correct assembly using D/S Double Sockets, spigots, and expansion gaps.)

REPAIRS

If a section of the soil stack requires replacement or if a fitting needs to be incorporated, follow these steps using a D/S Double Socket:

1. Prepare the Pipe Section:

- Ensure the required length of pipe allows for a minimum spigot length at each end:
  - 82mm or 110mm pipe: 60mm
  - 160mm pipe: 100mm

2. Cut & Prepare

- Cut the existing pipe section, leaving a 12mm expansion gap at each end.
- Chamfer and lubricate the spigots, then fit the D/S Double Socket securely.


3. Position & Secure

- Insert the new pipe section using socket brackets where needed and lubricate the spigots.
- Slide the D/S Double Socket over the new spigots, ensuring proper alignment over the joint/expansion gap.
- Fix the socket brackets firmly into their final position.

TESTING

After installation or repair, all systems should be inspected and tested in compliance with ISO 3633 / EN 1329 standards.

- Air testing is the preferred method for leak detection.
- Avoid smoke testing, as it is not recommended for plastic pipe systems.

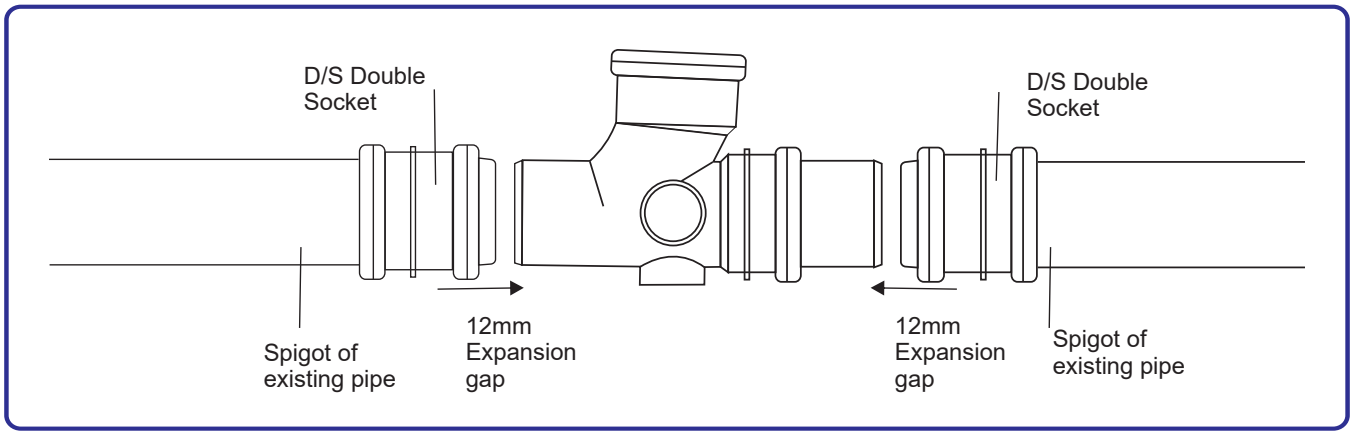

DADEX Eternit Limited

Karachi Sales Office: Plot #.119-C, Office #.302, 3rd Floor, Anum Tower,
Jami Commercial Street #: 13, DHA Phase-07, Karachi.
UAN: (92-21) 111 000 789, 021-36275087
Web : www.dadex.com www.facebook.com/dadexpk/

Dadex Sales Offices

- **Karachi:** (92-21) 36275087.
  E-mail: sales@dadex.com.pk
- **Lahore:** (92-42) 3718 0152.
  E-mail: lahore@dadex.com.pk
- **Faisalabad:** (92-41) 8861981.
  E-mail: faisalabad@dadex.com.pk
- **Multan:** (92-61) 4545259.
  E-mail: multan@dadex.com.pk
- **Islamabad:** (92-51) 5975109 - 110.
  E-mail: islamabad@dadex.com.pk

Dadex Authorised Distributor for Nikasi

Galaxy Pipe Store
Shop # 6E, Building No. 7E, 27th Com. Street, Tauheed Com. Area, Phase V, DHA. Karachi.
Tel: 0300-2929567 | E-mail: akhtarnawaz38@gmail.com

For Technical information and assistance, please contact Dadex Techno Commercial Department at sales@dadex.com.pk

Note: All information contained in this literature is provided in good faith. The user should, however, verify that the product is fit for the intended purpose and application. Please ensure compliance with all health and safety requirements. While continuing its program of continuous development, the Seller reserves the right to modify or extend any published information without prior notification. No responsibility can be accepted for errors, omissions, or incorrect assumptions.

Seller's Responsibility: The responsibility of the seller ceases once the goods are delivered to the buyer's representative at our factory, where delivery is taken in person. In other cases, the responsibility of the seller shall cease once the goods are delivered to the buyer's or carrier's authorized representative(s). No claims of any type—including in-transit loss, damage, pilferage, or short-delivery—will be entertained by the seller, and the buyer agrees to hold the seller harmless in this regard. Additionally, the seller shall not be responsible for any consequential damages, including but not limited to economic loss of any kind whatsoever, upon the products being delivered to the buyer as per the terms of this Clause. Any claim or responsibility as stated herein will not be entertained by the seller, and such action shall not be the cause of a dispute by the buyer.

Jan-2026