FlowLine

INSPECTION CHAMBERS AND MANHOLES





PP


WASTE AND STORM WATER SEWERS, WATER DRAINAGE SOLUTIONS AND SUB-DRAINAGE SYSTEMS

magnaplast

DADEX

DADEX

Leader in Roofing and Thermoplastic Piping Systems

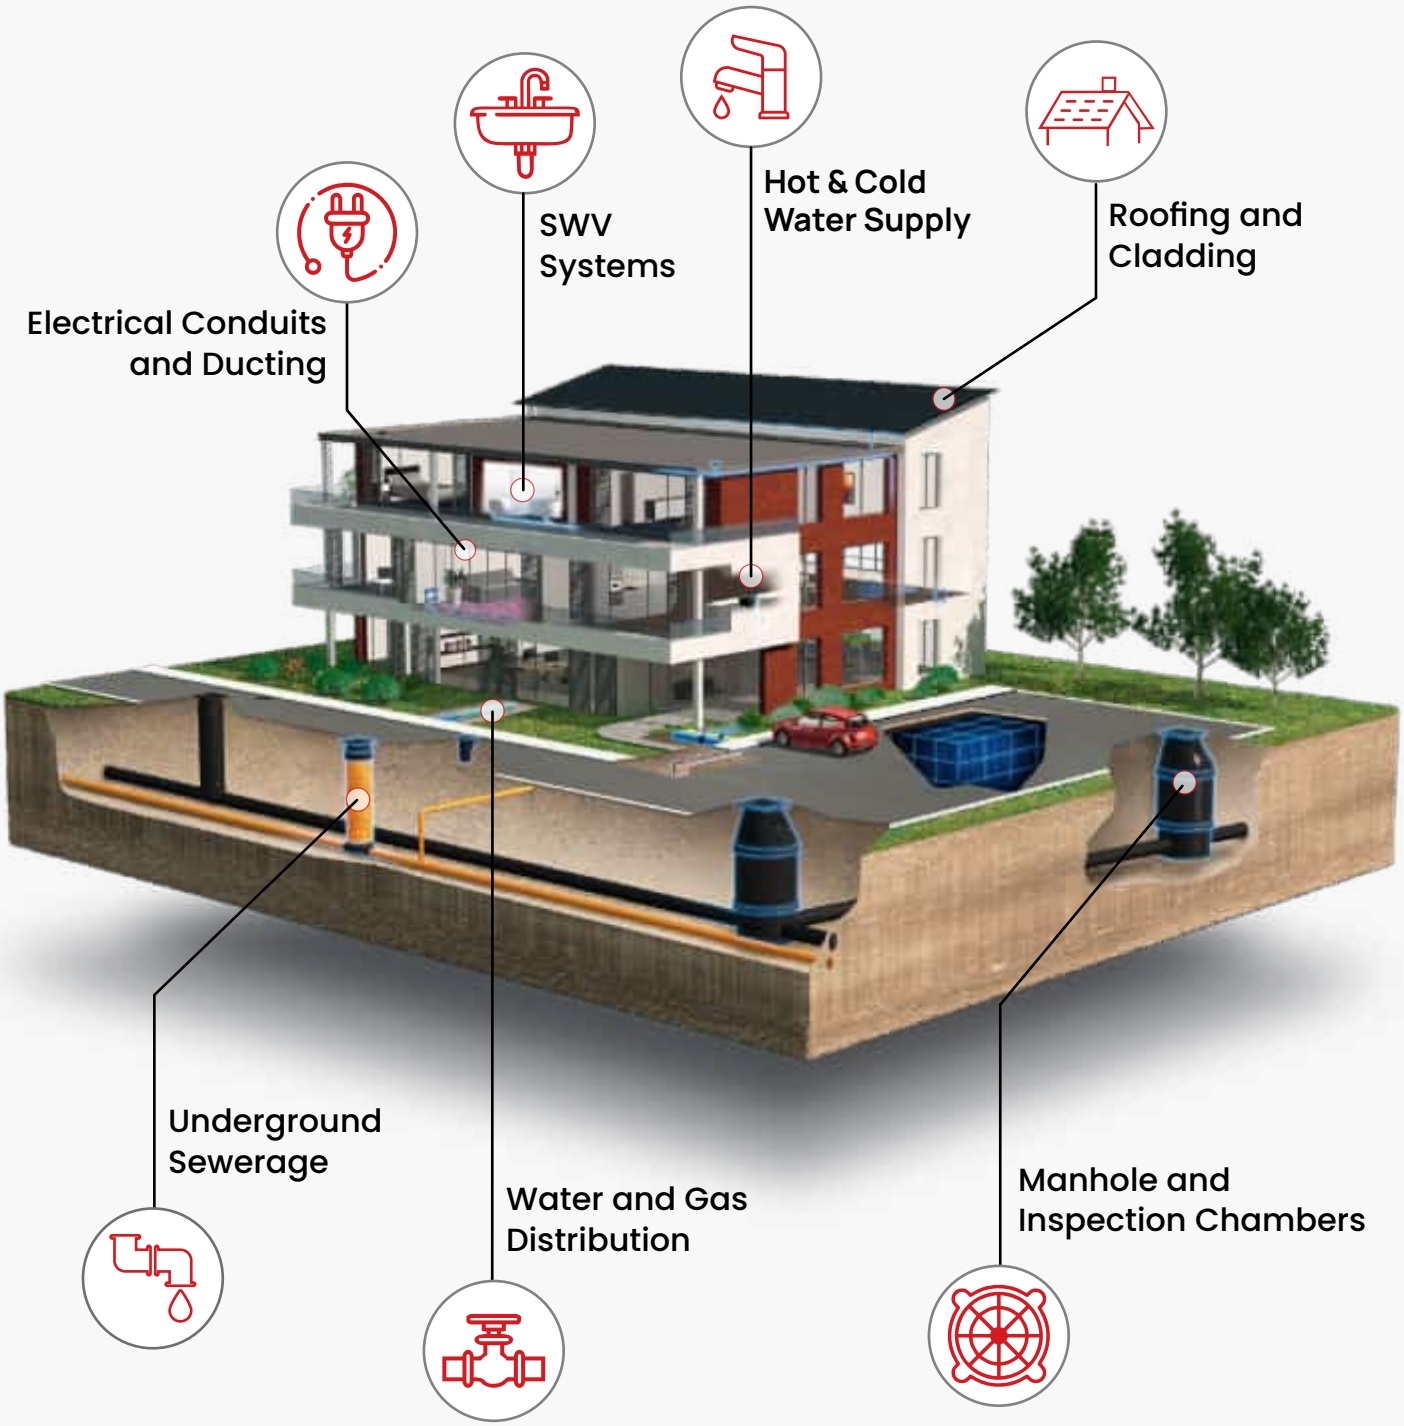

Discover our broad portfolio at

www.dadex.com

ABOUT DADEX

Dadex was established as a Public Limited Company in 1959. We started with the manufacturing of FC roofing systems at our facilities in Hyderabad, under the dynamic leadership of our Founder Chairman, Mr. Kassim Dada. Being a forward-looking organization, his son, Mr. Sikander Dada kept up to date with the market, and was instrumental in the diversification with plastic piping systems. Presently we produce various thermoplastic systems such as UPVC, PP-R, PP-RCT, PP, PE.

Headquartered in Karachi, our two manufacturing facilities based in Hyderabad and Sundar Industrial Estate (near Lahore) are equipped with state of the art machinery. Our joint efforts have led Dadex to the ISO 9001, ISO 14001, ISO 45001 and PSQCA certifications.

We aim to set standards in every field we enter. Customer focus, quality and innovation are reflected in every aspect of our business. Offering customized solutions to a cross section of markets for over 65 years, Dadex today is a hallmark of trust and reliability.

We believe that our strength lies in delighting our customers. That is why providing quality products backed by round the clock technical support services are the Dadex promise to all our valued customers.

EXTENSIVE PRODUCT RANGE

Water Supply - Infra-Structure

- Aquadex (UPVC Pressure Pipe System)
- T-Flex (PE 100 Pipes & Fittings)

Water Supply - Housing

- Polydex Premium (PP-RCT Pipe System)
- Polydex (PP-R Pipe System)
- Thermoline (PP-R Pipe System)
- Aquadex (UPVC Pressure Pipe System)

Soil, Waste and Vent (SWV)

- Nikasi - Solvent (UPVC Pipe System)
- Nikasi - Rubber Ring (UPVC Pipe System)
- Polyduct (Low Noise System)

Underground Sewerage and Drainage

- Flow Line (UPVC Underground Sewerage System)
- Inspection Chambers and Manholes

Cable Ducting

- PE Cable Duct Pipes
- Electroduct
  (UPVC Conduits as per IEC - EN Standard)
- Electrical Conduits
  (UPVC Conduits as per Dadex Standard)

Gas Supply

- T-Flex for gas (PE 80 and PE 100)

INTRODUCTION

Inspection chambers based on plastics are commonly used for waste and storm water sewers, water drainage solutions and sub-drainage systems. Inspection chambers allow operating sewage and drainage systems to be maintained with service tools and equipment designed for inspection chambers without manhole access. Catch basins and drainage chambers are highly functional additions to storm water sewers and sub-drainage systems.


A complete inspection chamber comprises three main components:

- Inspection chamber base unit
- Smooth or corrugated rising pipe (depending on the inspection chamber system)
- Chamber top

Dadex offers three types of inspection chamber: **315**, **400**, and **425**.

Chamber base units are made from injection-moulded polypropylene (PP).

The use of PP means the chamber base units are extremely durable and highly resistant to damage from impact, including at extremely low temperatures. The surface finish of each chamber base unit is very smooth and greatly reduces the risk of blockages forming. The high manufacturing precision of the chamber base units and their elastomer seals minimises the risk of black or grey water exfiltration and ground water infiltration.

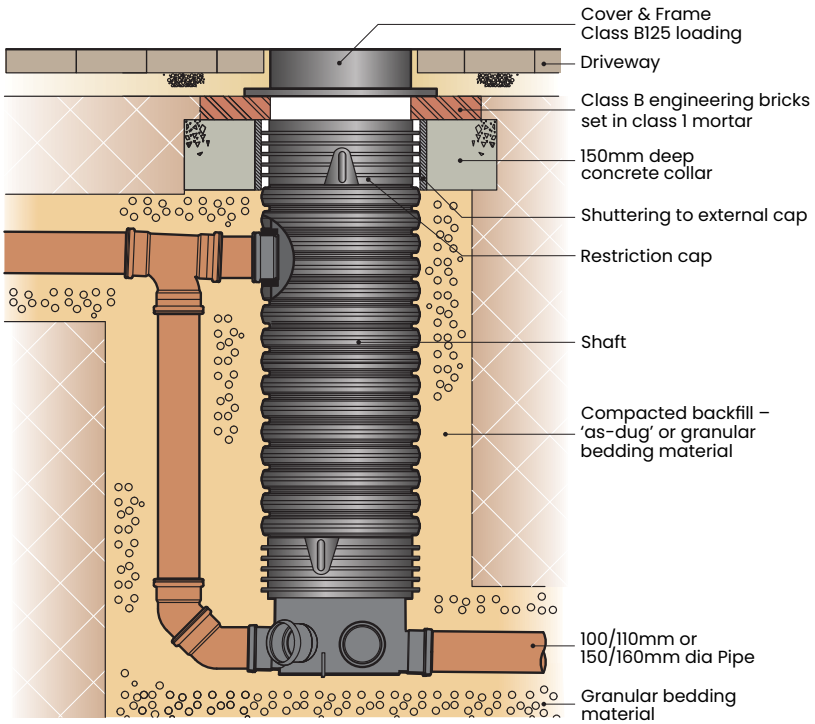

The rising pipe can be a type 400 smooth-walled drainage pipe or a type 315 / 425 corrugated drainage pipe – the choice depends on the chamber base unit. The rising pipe can be trimmed to size on site – this requires a manual or power saw. The design of chamber base units is fully compatible with FlowLine piping and the Magnacor system of corrugated pipes.

MATERIAL SPECIFICATION

Component	Material
Chamber Base	Polypropylene (PP)
Rising Pipe	PP / PVC
Seals	Elastomeric Rubber
Cover System	PP / Cast Iron (depending on load class)

APPLICATIONS

The Inspection Chambers are ideal for:

RESIDENTIAL PROJECTS

- Housing schemes
- Villas
- Apartment projects

COMMERCIAL DEVELOPMENTS

- Shopping centers
- Commercial buildings
- Mixed-use developments

MUNICIPAL INFRASTRUCTURE

- Sewerage systems
- Stormwater networks
- Road drainage

INDUSTRIAL APPLICATIONS

- Industrial wastewater systems
- Factory drainage
- Utility infrastructure

RAINWATER MANAGEMENT

- Surface drainage
- Groundwater drainage
- Rainwater collection systems



KEY FEATURES

Advantages over traditional concrete chambers:

- Lightweight
- Corrosion resistant
- Leak-resistant sealing system
- Smooth hydraulic channel
- Fast installation
- Adjustable installation height
- High impact resistance
- Chemical resistance
- Long service life
- Lower maintenance



WHY CHOOSE DADEX INSPECTION CHAMBERS?

EUROPEAN QUALITY ENGINEERING
Manufactured using advanced European production technology and high-precision moulding systems.

HIGH IMPACT RESISTANCE
Polypropylene chamber bases provide exceptional resistance to:

- Mechanical impact
- Corrosion
- Low temperatures
- Chemical exposure

LIGHTWEIGHT SYSTEM
Compared to traditional concrete chambers:

- Easier handling
- Faster transportation
- Reduced labor requirements
- Faster installation

SMOOTH INTERNAL FLOW
Hydraulically optimized smooth surfaces help reduce:

- Sediment accumulation
- Blockages
- Flow restriction

LEAK-RESISTANT PERFORMANCE
Precision seals help minimize:

- Sewage exfiltration
- Groundwater infiltration

FLEXIBLE INSTALLATION
Rising pipes can be trimmed on-site for accurate level adjustment.







PRODUCT COMPARISON SHEET

Comparison PP Chambers vs Conventional RCC Chambers

Feature	PP Chambers	RCC Chambers
Material	Polypropylene (PP)	Reinforced Concrete
Weight	Lightweight	Heavy
Installation Speed	Fast	Slow
Transportation	Easy	Difficult
Corrosion Resistance	Excellent	Limited
Chemical Resistance	Excellent	Moderate
Leak Resistance	High	Joint leakage possible
Hydraulic Flow	Smooth internal surface	Rough internal surface
Maintenance	Low	Higher
Labor Requirement	Reduced	Higher
Site Handling	Easy	Requires heavy handling
Height Adjustment	Easy on site	Difficult
Structural Durability	Excellent	Good
Sediment Accumulation	Reduced	Higher
Installation Equipment	Minimal	Heavy equipment often required



Combination of an inspection chamber with the Magnacor corrugated pipe system:







CHAMBER TOPS


The chamber top class depends on the location of the inspection chamber and is defined in the engineering plans. Magnaplast carries chamber tops, the classification depending on the installation location and are broken down into the groups defined in PN-EN 124.

Group 1 (min. class A15), 1.5 ton load capacity: installation in surfaces open to pedestrian and bicycle traffic only;


Group 2 (min. class B125), 12.5 ton load capacity: light vehicular traffic areas (pedestrian pavements, yards and parking lots);

Group 4 (min. class D400), 40 ton load capacity: heavy vehicular traffic (roads, streets and driveways).

For green lands and areas not exposed to loads from traffic, non-classified inspection chamber tops can be used, including PP chamber covers.

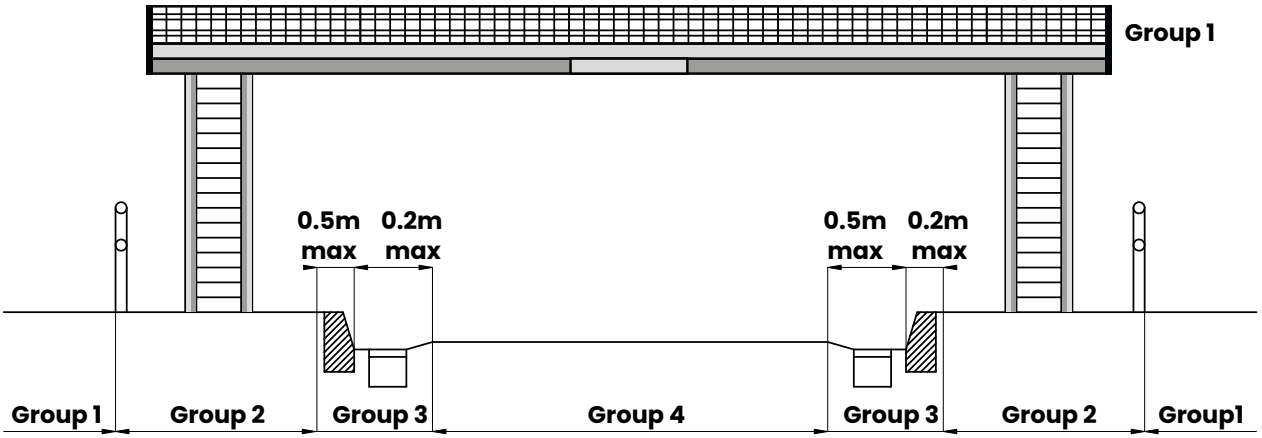

Group 3 (min. class C 250): this applies to the chamber tops located beside kerbs, in areas which extend 0.5 m maximum into the vehicular traffic lane and 0.2 m maximum into the pedestrian traffic lane (measured from the kerb upright side).

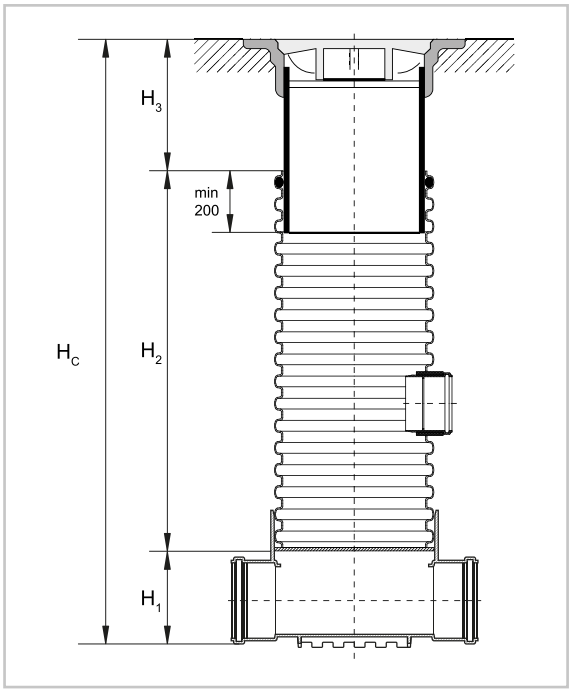

Choosing the inspection chamber height

Hc = H1 + H2 + H3

where:

Hc - overall inspection chamber height.
H1 - inspection chamber service height
H2 - rising pipe height
H3 - telescope service height

QUALITY CONTROL

All products, including inspection chambers, must pass strict quality inspections and comply withall mandatory standards. The first-class quality of the products is also certified by the ISO 9001 quality management system maintained by the manufacturer.





PRODUCT CATALOGUE

PRODUCT RANGE

Polypropylene inspection chambers are available in three sizes:

TYPE 315

Compact Residential Chamber System



Ideal for:
- Residential drainage
- House sewer connections
- Small-scale drainage systems

Features:
- Corrugated rising pipe
- Lightweight construction
- Quick installation
- Easy maintenance access

Available Inlet Sizes:
- DN-160, DN-200

TYPE 400

Versatile Multi-Application Chamber System



Suitable for:
- Residential projects
- Commercial developments
- Municipal drainage systems

Features:
- Smooth rising pipe
- Multiple inlet configurations
- Adjustable installation height

Available Inlet Sizes:
- DN-110, DN-160, DN-200, DN-250, DN-315

TYPE 425

Heavy Duty Infrastructure Chamber System



Designed for:
- Municipal infrastructure
- Industrial drainage
- Road drainage networks
- High-flow sewer systems

Features:
- Corrugated heavy-duty riser
- High structural strength
- Traffic load compatibility


Available Inlet Sizes:
- DN-160, DN-200, DN-250, DN-315


INSPECTION CHAMBER



TYPE 315

CHAMBER BASE TYPE 315 STRAIGHT
WITH SEAL

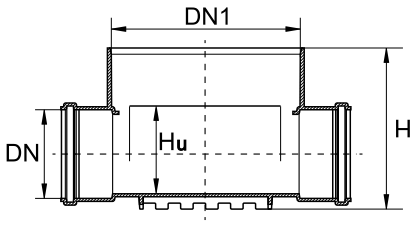







DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]
160	341	290	165	521
200	341	336	200	513

CHAMBER BASE TYPE 315 (3 INLETS)
WITH SEAL

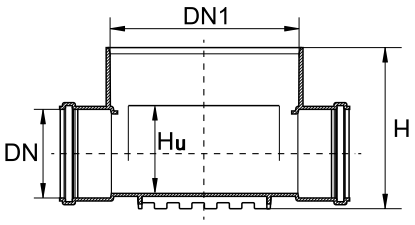

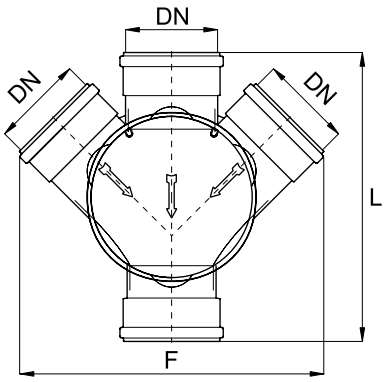




DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]	F [mm]
160	341	310	185	521	650
200	341	356	220	513	680

CORRUGATED RISING PIPE RCP 315







DN [mm]	DN1 [mm]	H [mm]
300	338	1250
300	338	2000
300	338	3000
300	338	6000

PP COVER, A15 - 1.5 T TYPE 315

INSTALLED DIRECTLY ON THE RCP 315 RISING PIPE









DN1 [mm]	DN2 [mm]	H [mm]
360	297	39

TELESCOPIC COVER

TELESCOPE PIPE WITH CAST IRON COVER








	D [mm]	DN1 [mm]	DN2 [mm]	H [mm]	H1 [mm]
A15 – 1.5 t cover without ventilation	342	310	295	475	50
B125 – 12.5 t cover without ventilation	342	255	295	495	90
D400 – 40 t cover without ventilation	342	255	295	495	90
B125 – 12.5 t cover with ventilation	342	255	295	495	90
D400 – 40 t with grate	342	255	295	495	90

TELESCOPE SEAL


FITS THE RCP 315 CORRUGATED RISING PIPE

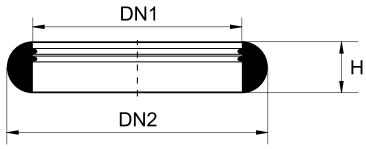




DN1 [mm]	DN2 [mm]	H [mm]
292	342	26

CONCRETE CONE WITH COVER TYPE 315 AND 400

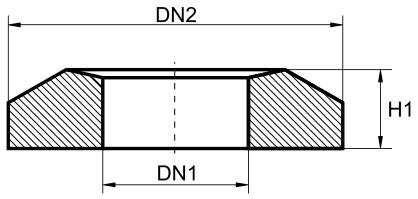






DN1 [mm]	DN2 [mm]	DN3 [mm]	H1 [mm]	H2 [mm]
410	700	640	110	70

PP BOTTOM


FITS THE RCP 315 CORRUGATED RISING PIPE

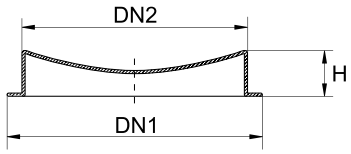




DN1 [mm]	DN2 [mm]	H [mm]
331	297	58

CONCRETE FRAME FOR COVER







D1 [mm]	D2 [mm]	DN [mm]	H [mm]
440	350	330	100

INSPECTION CHAMBER





type 400

INSPECTION CHAMBER COMPONENTS:

- Chamber base with seal, profiled bottom, and branch ports (if any)
- Rising pipe
- Telescope (telescopic pipe complete with a cast-iron chamber cover)
- Casing end seal

CHAMBER BASE TYPE 400 STRAIGHT
WITH SEAL

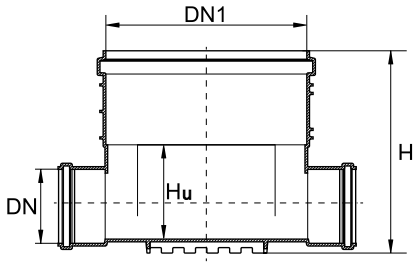







DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]
110	400	351	355	456
160	400	432	205	590
200	400	401	410	509
250	400	530	293	710
315	400	800	540	1080

CHAMBER BASE TYPE 400 3 INLETS
WITH SEAL

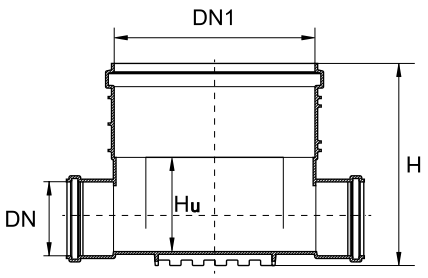






DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]	F [mm]
110	400	352	335	456	550
160	400	432	205	536	600
200	400	402	410	509	660
250	400	800	545	1130	1130
315	400	800	545	1080	1130

SMOOTH RISING PIPE RSP 400







DN [mm]	H [mm]
400	2000
400	3000
400	6000

PP COVER, A15 - 1.5 T TYPE 400

INSTALLED DIRECTLY ON THE RSP 400 RISING PIPE





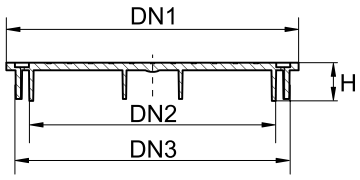



DN1 [mm]	DN2 [mm]	DN3 [mm]	H [mm]
448	379	426	45

TELESCOPIC COVER

TELESCOPE PIPE WITH CAST IRON COVER









	D [mm]	DN1 [mm]	DN2 [mm]	H [mm]	H1 [mm]
A15 - 1.5 t cover without ventilation	342	310	295	475	50
B125 - 12.5 t cover without ventilation	342	255	295	495	90
D400 – 40 t cover without ventilation	342	255	295	495	90
B125 - 12.5 t cover with ventilation	342	255	295	495	90
D400 – 40 t cover with ventilation	342	255	295	495	90

TELESCOPE CASING END SEAL FOR RSP 400 SMOOTH RISING PIPES

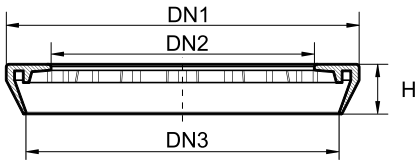







DN1 [mm]	DN2 [mm]	DN3 [mm]	H [mm]
404	277	366	73

CONCRETE CONE WITH COVER TYP 400 AND 315

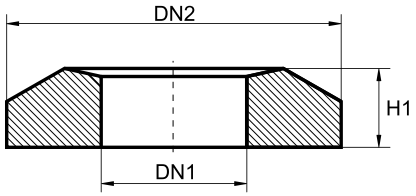







DN1 [mm]	DN2 [mm]	DN3 [mm]	H1 [mm]	H2 [mm]
410	700	640	110	70

CONCRETE FRAME FOR COVER







D1 [mm]	D2 [mm]	DN [mm]	H [mm]
440	350	330	100

INSPECTION CHAMBER





type 425

INSPECTION CHAMBER COMPONENTS:

- Chamber base with seal, profiled bottom, and branch ports (if any)
- Rising pipe
- Telescope (telescopic pipe complete with a cast-iron chamber cover)
- Casing end seal / seal for telescope

CHAMBERS BASE TYPE 425 STRAIGHT
WITH SEAL

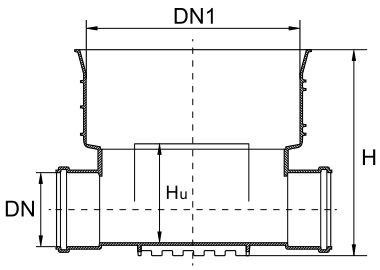







DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]
110	455	335	200	460
160	455	441	210	590
200	455	384	240	515
250	455	780	515	1130
315	455	780	520	1080

CHAMBERS BASE TYPE 425 3 INLETS
WITH SEAL

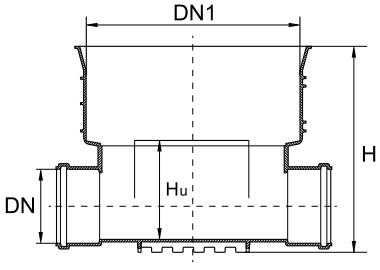






DN [mm]	DN1 [mm]	H [mm]	Hu [mm]	L [mm]	F [mm]
110	455	334	200	460	550
160	455	432	210	536	600
200	455	384	240	515	620
250	455	780	515	1130	1130
315	455	780	520	1080	1130

corrugated rising pipe RCP 425



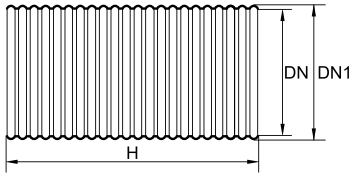



DN [mm]	DN1 [mm]	H [mm]
400	451	2000
400	451	3000
400	451	6000

PP COVER, A15 - 1.5 T TYPE 425

INSTALLED DIRECTLY ON THE RCP 425 RISING PIPE









DN1 [mm]	DN2 [mm]	H [mm]
448	396	48

TELESCOPIC COVER

TELESCOPE PIPE WITH CAST IRON COVER








	D [mm]	DN1 [mm]	DN2 [mm]	H [mm]	H1 [mm]
A15 - 1.5 t cover without ventilation	342	310	295	475	50
B125 - 12.5 t cover without ventilation	342	255	295	495	90
D400 – 40 t cover without ventilation	342	255	295	495	90
B125 - 12.5 t cover with ventilation	342	255	295	495	90
D400 – 40 t cover with ventilation	342	255	295	495	90

Adapter PP RCP 425 with 295 seal for the RCP 425 corrugated riser pipe

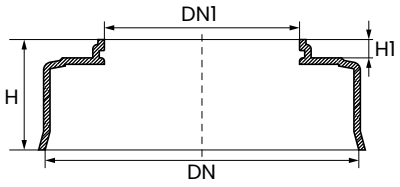




DN [mm]	DN1 [mm]	H [mm]	H1 [mm]
455	295	160	28
RCP 425			

Seal for RCP 425 required. See p. 24

TL-400 TELESCOPE WITH COVER FOR RCP 425

WITH TELESCOPIC PIPE AND SOLID CAST-IRON COVER

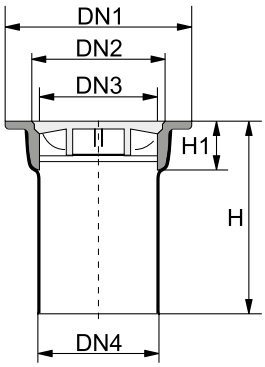







	DN1 [mm]	DN2 [mm]	DN3 [mm]	DN4 [mm]	H [mm]	H1 [mm]
B125 – 12.5 t / TL-400	524	414	325	392	650	110
D400 – 40 t / TL-400	524	414	325	392	650	110
D400 – 40 t / TL-400 (with grate)	524	414	325	392	650	110

TL-400 STREET INLET FOR RCP 425

WITH TELESCOPIC PIPE AND HINGED CAST-IRON GRATE








	DN1 [mm]	DN2 [MM]	DN3 [mm]	DN4 [MM]	DN5 [MM]	DN6 [MM]	H1 [MM]	H [MM]
D400 – 40 t / TL-400 (with grate)	450	432	340	370	392	406	160	685

TL-400 TELESCOPE SEAL FOR RCP 425 / FOR INSTALLATION INSIDE THE RCP
OR ADAPTER SEAL FOR RCP 425 / FOR INSTALLATION OUTSIDE THE RCP




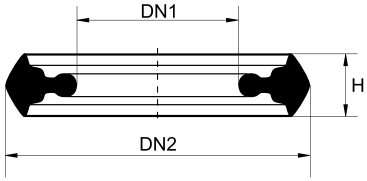


DN1 [mm]	DN2 [mm]	H [mm]
377	450	31

CONCRETE CONE WITH COVER TYPE 425






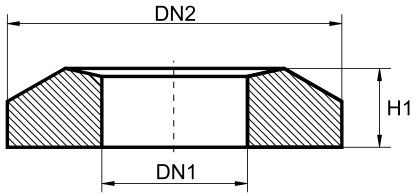

DN1 [mm]	DN2 [mm]	DN3 [mm]	H1 [mm]	H2 [mm]
470	700	640	110	70

PP BOTTOM
FITS THE RCP 425 CORRUGATED RISING PIPE




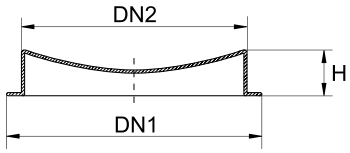


DN1 [mm]	DN2 [mm]	H [mm]
460	393	75

CONCRETE FRAME FOR COVER








D1 [mm]	D2 [mm]	DN [mm]	H [mm]
440	350	330	100

ACCESSORIES


IN-SITU SEAL






	D1 [mm]	D2 [mm]	D3 [mm]	A [mm]	B [mm]
DN 110	110	140	157	48	61
DN 160	160	190	205	50	65
DN 200	200	230	250	50	60

HOLE SAW FOR IN-SITU





	DN [mm]	H [mm]
DN 110	138	89
DN 160	186	89
DN 200	226	89

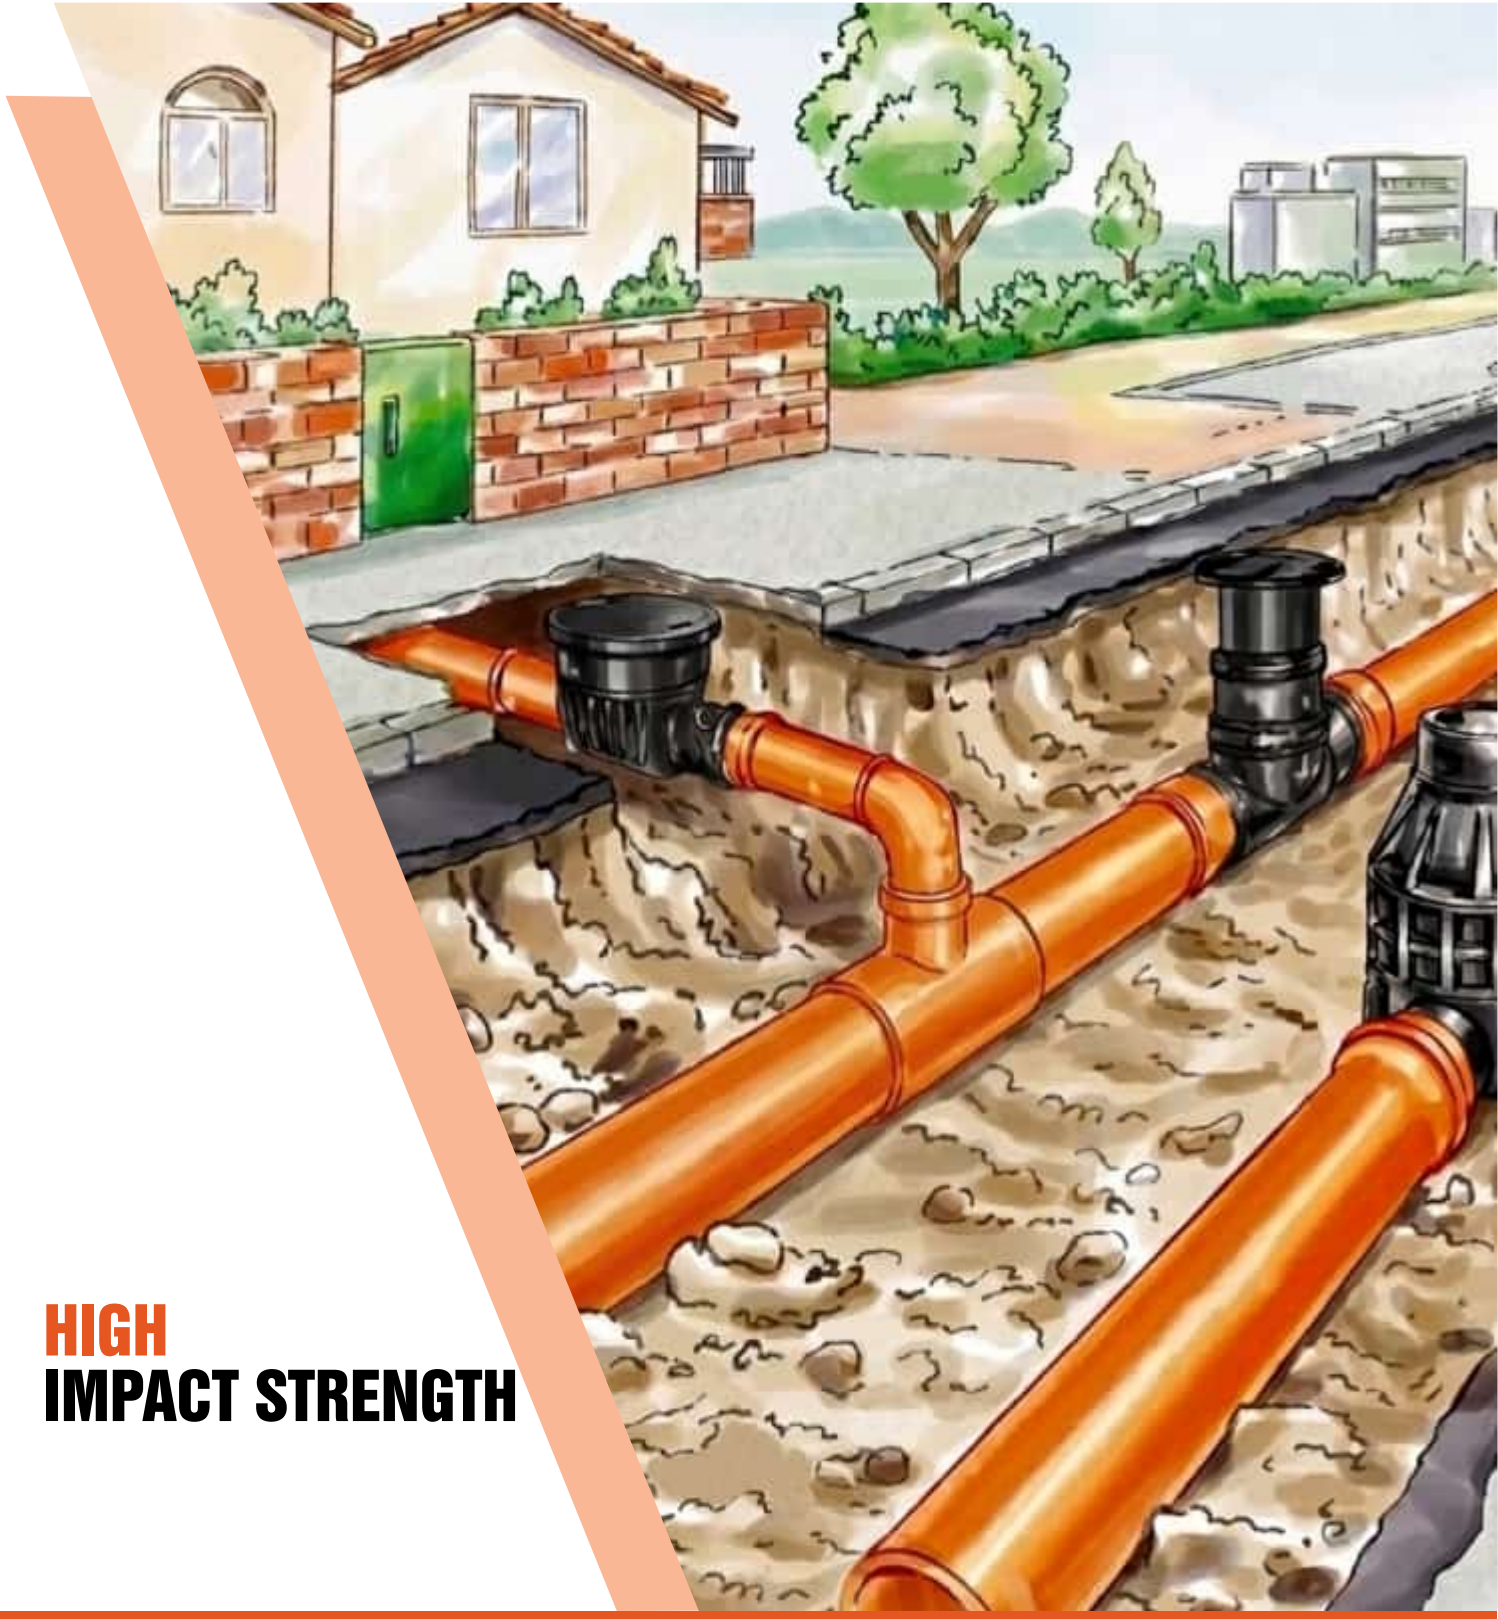

HIGH
IMPACT STRENGTH

INSTALLATION INSTRUCTIONS

INSTALLATION INSTRUCTIONS

The inspection chamber must be installed in a properly prepared and drained earth pit and according to the engineering plans of the drainage system.



1. Remove all large and sharp stones or other hard objects from the pit, and create a bedding layer (at least 10 cm thick) of coarse sand.



2. Position the chamber base unit on the sand bedding (remember to level it properly and consider the base unit base slope of 1.5%), connect the drainage pipes, and bury the chamber base unit to approximately 10 cm above the pipe height to secure the base unit against shifting.



3. Cut the rising pipe to length and mount (corrugated rising pipes must be cut in the valley and not on the ridge, followed by installation of the seal in the first valley from the trimmed edge).




4. Clean the chamber base unit. Apply a lubricant to the inside of the chamber base unit and the seal on the rising pipe. Install the rising pipe securely, with the seal towards the chamber base units. The inspection chamber is ready to be buried in easily compatible soil. Bury the inspection chamber in layers, each up to 30 cm deep.



5. Install the chamber top

CATCH BASINS

The rising pipes can be combined to construct a catch basin. Instead of a chamber base unit, a PP bottom or a blind plate is installed. The catch basin is closed with a suitable chamber top. Follow the installation instructions (see Section 5 on p. 29).

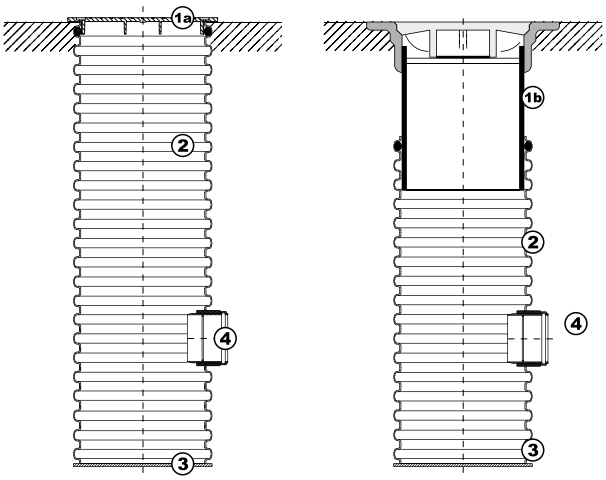

Design of a catch basin

1a. PP cover
1b. Telescopic cover
2. Rising pipe
3. PP bottom
4. In-situ seal

IN-SITU SEAL

The in-situ seals allow the addition of another connection to the rising pipe. The chamber outlet port can be installed at any height along the rising pipe, and sealed with the in-situ seal.

In-situ seal installation




1. Cut a hole at the required height on the rising pipe and deburr it completely.



2. Install the in-situ seal in the opening and apply a lubricant.



3. Connect the drain pipe.

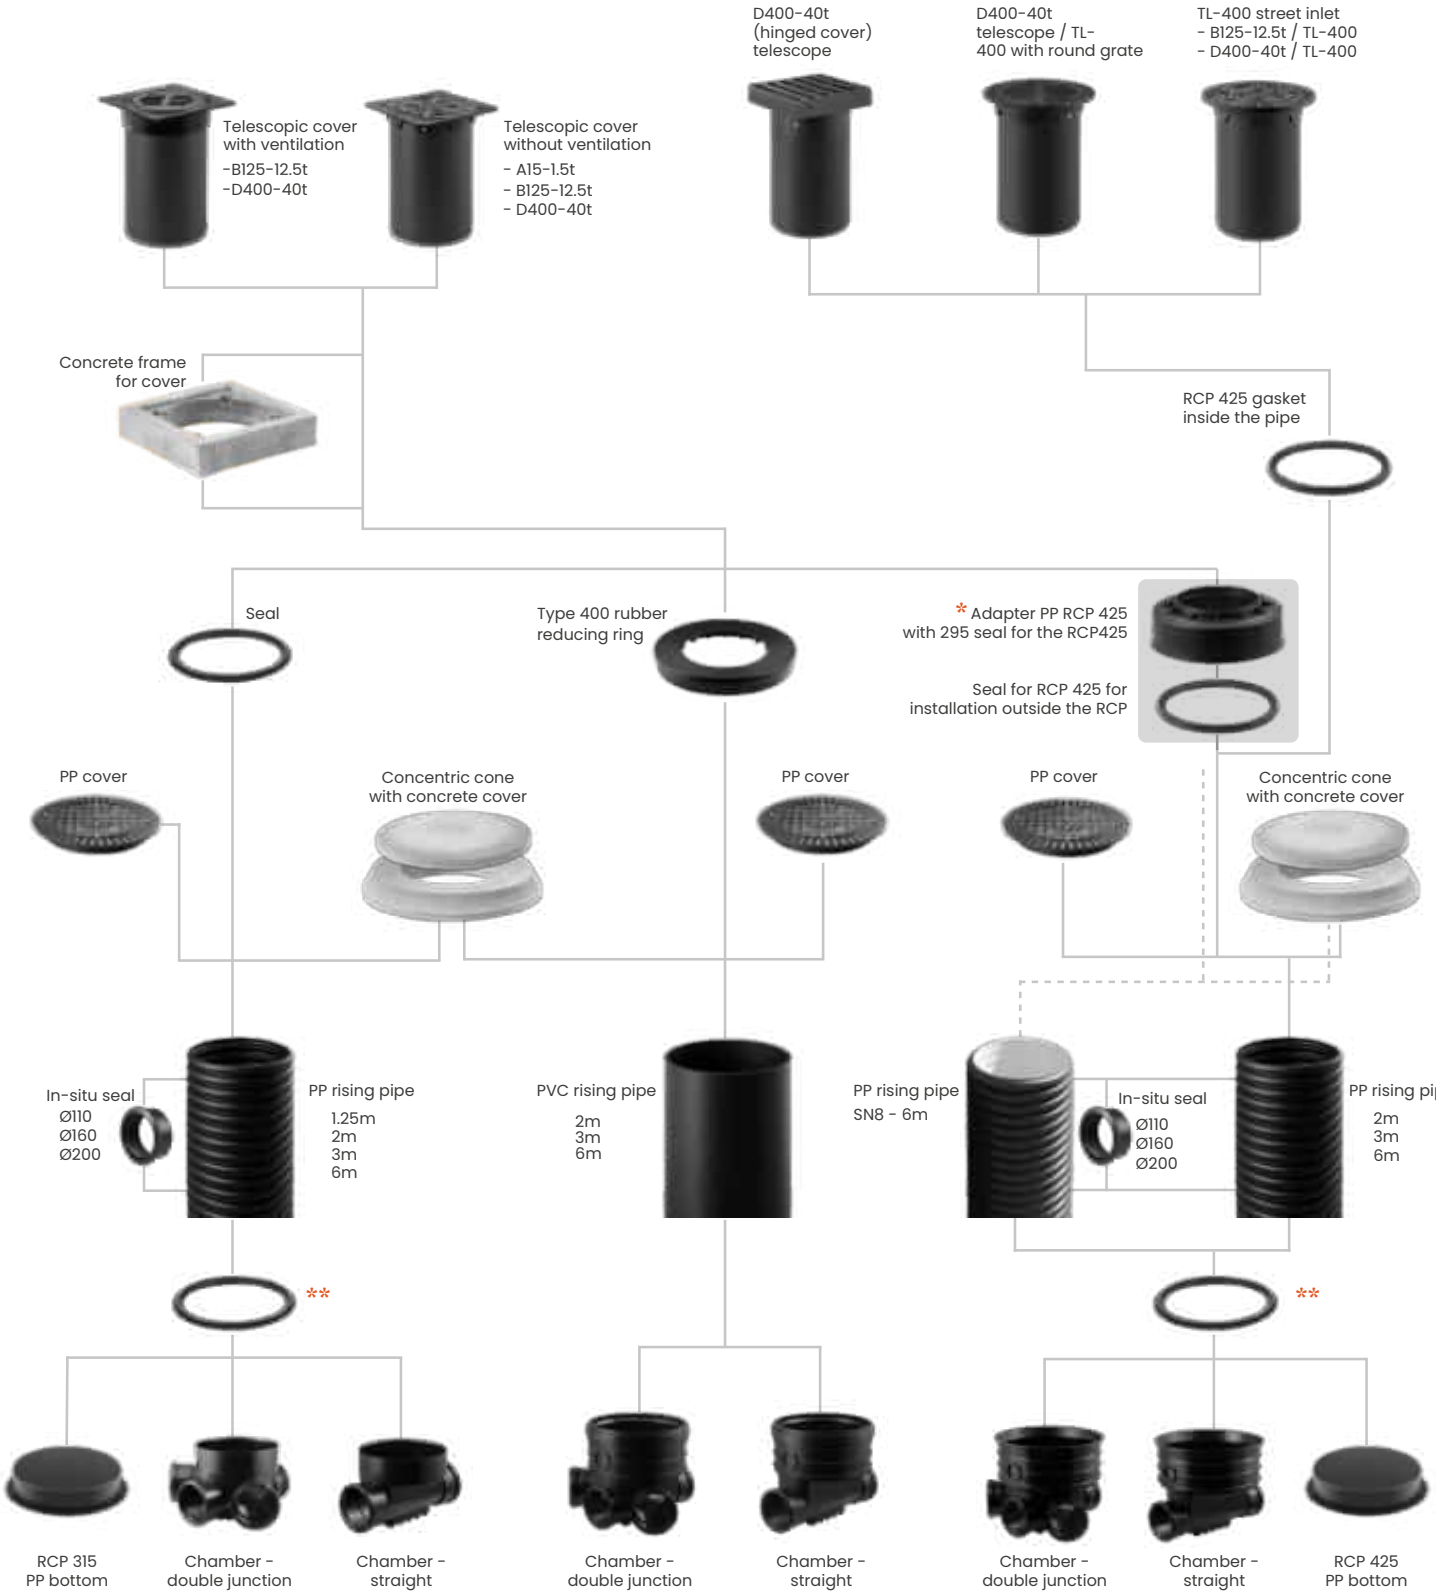

* The PP RCP 425 adapter replaced the rubber sleave of the 425 type

** The gasket delivered complete with the chambers



PRODUCT DATA SHEET



PRODUCT DATA SHEET

SEWAGE CHAMBERS SC RWK 315

SC inspection chambers, manufactured from polypropylene (PP) by injection moulding, are widely used for the construction of gravity sewer systems (sanitary, rainwater, general and industrial) and sewage systems. Inspection chambers allow maintenance work to be carried out using specialised inspection or cleaning equipment.

Design	Chamber base with seal, corrugated rising pipe, top piece
Chamber base	**Material:** PP Polypropylene **Diameter of inlets:** DN160, DN200 **Base type:** collective TYPE II – 3 inlets (right, left = 45°, through = 180°), through TYPE I, through = 180°
Corrugated rising pipe – on a single layer	**Material:** PP Polypropylene or PE Polyethylene **Length of sections:** L–1.25 m, L–2 m, L–3 m, L–6 m **Peripheral stiffness:** SN = 4 kN/m²
Closing	**Full cast iron telescopic cover or with grille:** **Class A15 – 1.5t** – areas intended for pedestrian and cycle traffic only, **Class B125 – 12.5t** – low traffic volume (pavements, squares, car parks), **Class D400 – 40t** – heavy traffic (roads, driveways) **PP plastic cover** – green areas and places not subject to stress **Concrete cone with cover** – green areas and places not subject to stress
Telescopic cover/pipe connection method	telescope seal RWK 315
Colour	black or orange
Inlet and outlet connections	Socket, fitted with an SBR elastomer seal. The design of the chamber base ensures full compatibility with KG PVC-U plain-end pipes, KG2000 PP MD, KG PP and the Magnacor PP twin-wall corrugated pipe system (transition fitting MC-KGI required)
Intended use	Rainwater, sanitary and combined sewer systems, sewer connections, Sewerage systems in areas of mining damage, systems with steep gradients
Areas of application	Application area "U" – underground non-pressure drainage and sewerage in areas with pedestrian and vehicular traffic outside building structures.
Maximum sewage temperature	90°C – continuous flow 95°C – instantaneous flow (up to 15 min.)
Chemical resistance	High resistance to aggressive effluents and environments in accordance with ISO/TR 10358 and ISO/TR 7620, pH 2–12
Depth of foundation	The maximum foundation depth is 6.0 m in accordance with EN 13598-2
Tightness of socket connections	0.5 bar
Documents	**PN-EN 13598-2:2020-11** **PN-EN 124-2:2015-07** **PN-EN 124-6:2015-07** **PN-EN 681-1:2002/A3:2006** **NATIONAL TECHNICAL ASSESSMENT No. IBDiM-KOT-2018/0197**



PRODUCT DATA SHEET

SEWAGE CHAMBERS SC RWG 400

SC inspection chambers, manufactured from polypropylene (PP) by injection moulding, are widely used for the construction of gravity sewer systems (sanitary, rainwater, general and industrial) and sewage systems. Inspection chambers allow maintenance work to be carried out using specialised inspection or cleaning equipment.

Design	Chamber base with seal, plain rising pipe, top piece
Chamber base	**Material:** PP Polypropylene **Diameter of inlets:** DN160, DN200 DN250, DN315 **Chamber base type:** collective TYPE II – 3 inlets (right, left = 45°, through = 180°), through TYPE I, through = 180°
Single layer corrugated rising pipe	**Material:** Unplasticised polyvinyl chloride PVC-U, **Length of sections:** L–2 m, L–3 m, L–6 m **Circumferential stiffness:** SN = 2 kN/m²
Closing	**Full cast iron telescopic cover or with grille:** **Class A15 – 1.5t** – areas intended for pedestrian and cycle traffic only, **Class B125 – 12.5t** – low traffic volume (pavements, squares, car parks), **Class D400 – 40t** – heavy traffic (roads, driveways) **PP plastic cover** – green areas and places not subject to loads **Concrete cone with cover** – green areas and places not subject to stress
Telescopic cover/pipe connection method	elastomer reducing gasket RWG 400
Colour	black or orange
Inlet and outlet connections	Socket, fitted with an SBR elastomer seal. The design of the casing ensures full compatibility with KG PVC-U plain-end pipes, KG2000 PP MD, KG PP and the Magnacor PP twin-walled corrugated pipe system (transition coupling MC-KGI required)

Intended use	Rainwater, sanitary and general sewer systems, sewer connections, Sewerage systems in areas of mining damage, systems with steep gradients
Areas of application	Application area "U" – underground non-pressure drainage and sewerage in areas with pedestrian and vehicular traffic outside building structures.
Maximum sewage temperature	90°C – continuous flow 95°C – instantaneous flow (up to 15 min.)
Chemical resistance	High resistance to aggressive effluents and environments in accordance with ISO/TR 10358 and ISO/TR 7620, pH 2–12
Depth of foundation	The maximum foundation depth is 6.0 m in accordance with EN 13598-2
Tightness of socket connections	0.5 bar
Documents	**PN-EN 13598-2:2020-11** **PN-EN 124-2:2015-07** **PN-EN 124-6:2015-07** **PN-EN 681-1:2002/A3:2006** **NATIONAL TECHNICAL ASSESSMENT No. IBDiM-KOT-2018/0197**



PRODUCT DATA SHEET

SEWAGE CHAMBERS SC RWK 425

SC inspection chambers, manufactured from polypropylene (PP) by injection moulding, are widely used for the construction of gravity sewer systems (sanitary, rainwater, general and industrial) and sewage systems. Inspection chambers allow maintenance work to be carried out using specialised inspection or cleaning equipment.

Design	Chamber base with seal, corrugated rising pipe, top piece
Chamber base	**Material:** PP Polypropylene **Diameter of inlets:** DN160, DN200 DN250, DN315 **Chamber base type:** collective TYPE II – 3 inlets (right, left = 45°, through = 180°), through TYPE I, through = 180°
Single layer corrugated rising pipe	**Material:** PP Polypropylene or PE Polyethylene **Length of sections:** L=2 m, L=3 m, L=6 m **Circumferential stiffness of single-layer rising pipe:** SN = 4 kN/m² **Circumferential stiffness double-walled rising pipe:** SN = 8 kN/m²
Closing	**Full cast iron telescopic cover or with grille:** **Class A15 – 1.5t** – areas intended for pedestrian and cycle traffic only, **Class B125 – 12.5t** – low traffic volume (pavements, squares, car parks), **Class D400 – 40t** – heavy traffic (roads, driveways) **PP plastic cover** – green areas and places not subject to stress **Concrete cone with cover** – green areas and places not subject to stress
Telescopic cover/pipe connection method	Plastic telescope adapter PP RWK 425 or elastomer seal RWK 425
Colour	black or orange
Inlet and outlet connections	Socket, fitted with an SBR elastomer seal. The design of the casing ensures full compatibility with KG PVC-U plain-end pipes, KG2000 PP MD, KG PP and the Magnacor PP twin-walled corrugated pipe system (transition coupling MC-KGI required)

Intended use	Rainwater, sanitary and combined sewer systems, sewer connections, Sewerage systems in areas of mining damage, systems with steep gradients
Areas of application	Application area "U" – underground non-pressure drainage and sewerage in areas with pedestrian and vehicular traffic outside building structures.
Maximum sewage temperature	90°C – continuous flow 95°C – instantaneous flow (up to 15 min.)
Chemical resistance	High resistance to aggressive effluents and environments in accordance with ISO/TR 10358 and ISO/TR 7620, pH 2–12
Depth of foundation	The maximum foundation depth is 6.0 m in accordance with EN 13598-2
Tightness of socket connections	0.5 bar
Documents	**PN-EN 13598-2:2020-11** **PN-EN 124-2:2015-07** **PN-EN 124-6:2015-07** **PN-EN 681-1:2002/A3:2006** **NATIONAL TECHNICAL ASSESSMENT No. IBDiM-KOT-2018/0197**

DADEX Eternit Limited

Karachi Sales Office: Plot #.119-C, Office #.302, 3rd Floor, Anum Tower,
Jami Commercial Street #: 13, DHA Phase-07, Karachi.
UAN: (92-21) 111 000 789, 021-36275087
Web : www.dadex.com www.facebook.com/dadexpk/

Dadex Sales Offices

- **Karachi:** (92-21) 36275087
  E-mail: sales@dadex.com.pk
- **Lahore:** (92-42) 3718 0152
  E-mail: lahore@dadex.com.pk
- **Faisalabad:** (92-41) 8861981
  E-mail: faisalabad@dadex.com.pk
- **Multan:** (92-61) 4545259
  E-mail: multan@dadex.com.pk
- **Islamabad:** (92-51) 5975109 - 110
  E-mail: islamabad@dadex.com.pk

For Technical information and assistance, please contact Dadex Techno Commercial Department at sales@dadex.com.pk

Note: All information contained in this literature is provided in good faith. The user should, however, verify that the product is fit for the intended purpose and application. Please ensure compliance with all health and safety requirements. While continuing its program of continuous development, the Seller reserves the right to modify or extend any published information without prior notification. No responsibility can be accepted for errors, omissions, or incorrect assumptions.

Seller's Responsibility: The responsibility of the seller ceases once the goods are delivered to the buyer's representative at our factory, where delivery is taken in person. In other cases, the responsibility of the seller shall cease once the goods are delivered to the buyer's or carrier's authorized representative(s). No claims of any type—including in-transit loss, damage, pilferage, or short-delivery—will be entertained by the seller, and the buyer agrees to hold the seller harmless in this regard. Additionally, the seller shall not be responsible for any consequential damages, including but not limited to economic loss of any kind whatsoever, upon the products being delivered to the buyer as per the terms of this Clause. Any claim or responsibility as stated herein will not be entertained by the seller, and such action shall not be the cause of a dispute by the buyer.

Jul-2026